


Let Us Offer You More Energy Solutions Today
Camelion has provided consumer friendly solutions for customers worldwide for over 12 years.
Our customers have been consistently satisfied with our quality, prices and attention to detail.
We offer a broad range of energy solutions. Try us out today.



- North America**
 - Canada
 - U. S. A
 - Mexico
- Caribbean/Latin America**
 - Argentina
 - Aruba
 - Bahamas
 - Barbados
 - Brazil
 - Bolivia
 - Colombia
 - Chile
 - Costa Rica
 - Cuba
 - Dominica
 - Dominican Republic
 - Ecuador
 - EL Salvador
 - Grenada
 - Guatemala
 - Honduras
 - Nicaragua
 - Panama
 - Paraguay
 - Peru
 - Porto Rico
 - Trinidad and Tobago
 - Uruguay
 - Venezuela
- Middle East /Africa**
 - Algeria
 - Egypt
 - Iran
 - Israel
 - Kuwait
 - Lebanon
 - Morocco
 - Qatar
 - Saudi Arabia
 - Syria
 - S. Africa
 - U.A.E
- Europe**
 - Austria
 - Bulgaria
 - Belgium
 - Czech Republic
 - Croatia
 - Denmark
 - England
 - Estonia
 - Finland
 - France
 - Germany
 - Georgia
 - Greece
 - Hungary
 - Holland
 - Latvia
 - Lithuania
 - Ireland
 - Italy
 - Portugal
 - Poland
 - Romania
 - Sweden
 - Slovakia
 - Slovenia
 - Spain
 - Turkey
 - Yugoslavia
 - Montenegro
 - Serbia
- Asia**
 - Azerbaijan
 - Armenia
 - China
 - Hong Kong
 - Indonesia
 - India
 - Korea
 - Kazakstan
 - Malaysia
 - Pakistan
 - Philippines
 - Russia
 - Singapore
 - Sri Lanka
 - Thailand
 - Vietnam
- Oceania**
 - Australia
 - New Zealand

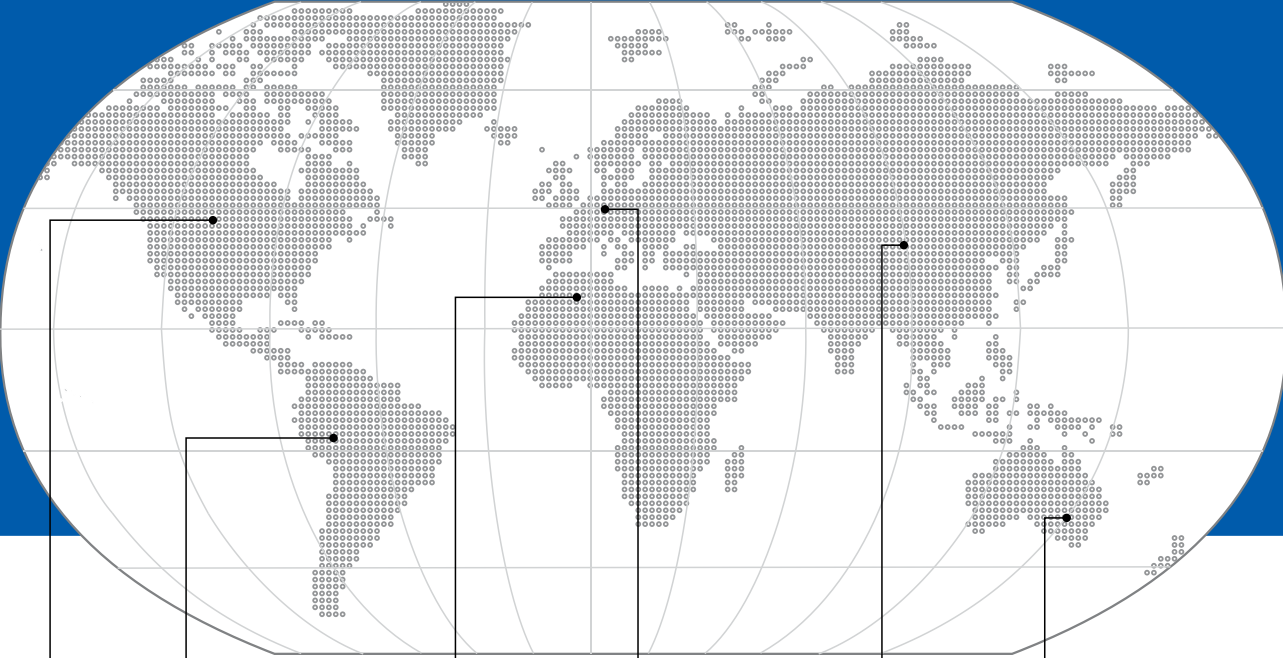

Rechargeables

- CHINA**
Camelion Battery Co., Ltd
Unit 705, Cyber Times Tower A,
Tianan Cyber Park, Shenzhen,
Guangdong 518041,
China
- HONG KONG**
Camelion Enterprises Ltd.
17/F., Ginza Square, No. 565-567
Nathan Road, Kowloon,
Hong Kong
- GERMANY**
Camelion Batterien GmbH.
Bergiusstr. 53-59,D - 12057 Berlin,
Germany
- North America**
Camelion North America Inc.
365 24th Street, LaSalle, IL 61301
- Latin America**
Camelion Battery Co., Inc.
5000 SW 75th Avenue, Suit 236
Miami, Florida 33155

For more information about the Camelion group of companies, please visit www.camelion.net

Camelion is a registered trademark of Camelion Battery Co., Ltd.
All other brand names are trademarks or registered trademarks of the respective companies.
Copyright ©2012 Camelion Battery Co., Ltd. All rights reserved.

RB&C-2012

www.camelionbattery.com

Camelion®
More Energy Solutions



More **Value**
For **your Money**

Today's sophisticated consumers want more for their money such as economical as well as powerful rechargeable batteries and chargers that provide excellent value at reasonable prices. Camelion delivers a broad range of innovative products from the new Camelion AlwaysReady® batteries that holds its charge up to a year to the smartest battery chargers on the market today.

- Economical:** Rechargeable batteries can be used again and again, saving consumers money.
 - Environmental Benefits:** One rechargeable battery can be charged several hundred times, therefore, reducing the use and disposal of single use batteries.
 - Powerful Batteries:** Support high drain devices such as digital cameras, games and music players.
 - Wide Feature Range:** Feature includes battery refresh, USB emergency charging, even solar charging and night lighting.
 - Fast, Safe Charging:** Camelion products are designed to charge batteries safely and fast, using a variety of security devices.
- Batteries can be charged in as little as an hour.

When you need economical and powerful batteries acquire Camelion.

Camelion®

Rechargeable Batteries

AlwaysReady Batteries	4
Ni-MH	6
Ni-Cd	9

Battery Chargers

Green Energy Chargers

SBC-3001	11
----------	-----------

Ultra Fast Chargers

BC-0907	12
---------	-----------

Super Fast Chargers

BC-1007	13
BC-0903	14
BC-0905A	15

Fast Chargers

BC-1002A/BC-1002B/BC-1002C	16
BC-1012	17
BC-1029	18
BC-1014	19
BC-0905B	20


Overnight Chargers

BC-1001A/BC-1001B	21
BC-1009	22
BC-1013	23
BC-1021C	24
BC-0901/BC-0901SMT	25
BC-0902	26
BC-0904S/BC-0904T/BC-0904SM	27
BC-0908	28
BC-0803	29
AC-8201	30

Universal Chargers

BC-0906S	31
LBC-308	32
LBC-312	33

Battery Charging Table

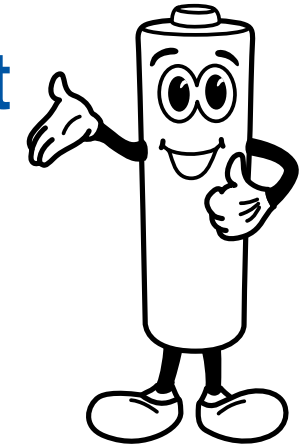

**Try us out
today!**

AlwaysReady™ Batteries

Tired of having to charge up your batteries? The new Camelion AlwaysReady battery is ready to use right from the packaging. After it is first charged, it stays charged longer than normal rechargeable batteries - up to a year. And it can be recharged again and again, saving you money. Are you ready? Try it today!



NH-AA2500ARBP4

1.2V AA

Packaging	
Blister	4 pcs/pack
Inner Box	12 packs/box
Outer Carton	96 packs/carton

Gross Weight:	12.0 kg
Volume:	0.0144 cbm

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	29.0(L) x 21.5(W) x 23.0(H)



NH-AA2500ARBP2

1.2V AA

Packaging	
Blister	2 pcs/pack
Inner Box	12 packs/box
Outer Carton	192 packs/carton

Gross Weight:	13.1 kg
Volume:	0.0274 cbm

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	41.0(L) x 29.0(W) x 23.0(H)



NH-AA2300ARBP4

1.2V AA

Packaging	
Blister	4 pcs/pack
Inner Box	12 packs/box
Outer Carton	96 packs/carton

Gross Weight:	11.8 kg
Volume:	0.0144 cbm

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	29.0(L) x 21.5(W) x 23.0(H)



NH-AA2300ARBP2

1.2V AA

Packaging	
Blister	2 pcs/pack
Inner Box	12 packs/box
Outer Carton	192 packs/carton

Gross Weight:	12.9 kg
Volume:	0.0274 cbm

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	41.0(L) x 29.0(W) x 23.0(H)



NH-AA2100ARBP4

1.2V AA

Packaging	
Blister	4 pcs/pack
Inner Box	12 packs/box
Outer Carton	96 packs/carton

Gross Weight:	11.7 kg
Volume:	0.0144 cbm

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	29.0(L) x 21.5(W) x 23.0(H)



NH-AA2100ARBP2

1.2V AA

Packaging	
Blister	2 pcs/pack
Inner Box	12 packs/box
Outer Carton	192 packs/carton

Gross Weight:	12.7 kg
Volume:	0.0274 cbm

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	41.0(L) x 29.0(W) x 23.0(H)



NH-AA1000ARBP4

1.2V AA

Packaging	
Blister	4 pcs/pack
Inner Box	12 packs/box
Outer Carton	96 packs/carton

Gross Weight:	11.4 kg
Volume:	0.0144 cbm

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	29.0(L) x 21.5(W) x 23.0(H)



NH-AA1000ARBP2

1.2V AA

Packaging	
Blister	2 pcs/pack
Inner Box	12 packs/box
Outer Carton	192 packs/carton

Gross Weight:	12.4 kg
Volume:	0.0274 cbm

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	41.0(L) x 29.0(W) x 23.0(H)



NH-AA800ARBP4

1.2V AA

Packaging	
Blister	4 pcs/pack
Inner Box	12 packs/box
Outer Carton	96 packs/carton

Gross Weight:	11.4 kg
Volume:	0.0144 cbm

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	29.0(L) x 21.5(W) x 23.0(H)



NH-AA800ARBP2

1.2V AA

Packaging	
Blister	2 pcs/pack
Inner Box	12 packs/box
Outer Carton	192 packs/carton

Gross Weight:	12.4 kg
Volume:	0.0274 cbm

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	41.0(L) x 29.0(W) x 23.0(H)



NH-AAA900ARBP4

1.2V AAA

Packaging	
Blister	4 pcs/pack
Inner Box	12 packs/box
Outer Carton	144 packs/carton

Gross Weight:	9.5 kg
Volume:	0.0168 cbm

Dimensions	
Blister (mm)	90(W) x 117(H) x 11(D)
Inner Box (mm)	125(L) x 84(W) x 97(H)
Outer Carton (cm)	31.0(L) x 27.0(W) x 20.0(H)



NH-AAA900ARBP2

1.2V AAA

Packaging	
Blister	2 pcs/pack
Inner Box	12 packs/box
Outer Carton	240 packs/carton

Gross Weight:	8.6 kg
Volume:	0.0269 cbm

Dimensions	
Blister (mm)	90(W) x 117(H) x 11(D)
Inner Box (mm)	125(L) x 84(W) x 97(H)
Outer Carton (cm)	51.0(L) x 27.0(W) x 19.5(H)



NH-AAA800ARBP4

1.2V AAA

Packaging	
Blister	4 pcs/pack
Inner Box	12 packs/box
Outer Carton	144 packs/carton

Gross Weight:	9.2 kg
Volume:	0.0168 cbm

Dimensions	
Blister (mm)	90(W) x 117(H) x 11(D)
Inner Box (mm)	125(L) x 84(W) x 97(H)
Outer Carton (cm)	31.0(L) x 27.0(W) x 20.0(H)



NH-AAA800ARBP2

1.2V AAA

Packaging	
Blister	2 pcs/pack
Inner Box	12 packs/box
Outer Carton	240 packs/carton

Gross Weight:	8.4 kg
Volume:	0.0269 cbm

Dimensions	
Blister (mm)	90(W) x 117(H) x 11(D)
Inner Box (mm)	125(L) x 84(W) x 97(H)
Outer Carton (cm)	51.0(L) x 27.0(W) x 19.5(H)



NH-AAA600ARBP4

1.2V AAA

Packaging	
Blister	4 pcs/pack
Inner Box	12 packs/box
Outer Carton	144 packs/carton

Gross Weight:	8.6 kg
Volume:	0.0168 cbm

Dimensions	
Blister (mm)	90(W) x 117(H) x 11(D)
Inner Box (mm)	125(L) x 84(W) x 97(H)
Outer Carton (cm)	31.0(L) x 27.0(W) x 20.0(H)



NH-AAA600ARBP2

1.2V AAA

Packaging	
Blister	2 pcs/pack
Inner Box	12 packs/box
Outer Carton	240 packs/carton

Gross Weight:	7.9 kg
Volume:	0.0269 cbm

Dimensions	
Blister (mm)	90(W) x 117(H) x 11(D)
Inner Box (mm)	125(L) x 84(W) x 97(H)
Outer Carton (cm)	51.0(L) x 27.0(W) x 19.5(H)



Ni-MH Rechargeable Batteries

Camelion Rechargeable Ni-MH batteries offer high capacity performance, up to 1000 recharge cycles, and, because they are used again and again, help reduce environmental waste. High drain devices such as music players and digital cameras are supported, so you can hear more songs and take more photos.



NH-D10000BP2

1.2V D

Packaging		
Blister	2 pcs/pack	Gross Weight: 17.0 kg
Inner Box	6 packs/box	Volume: 0.0244 cbm
Outer Carton	48 packs/carton	

Dimensions	
Blister (mm)	90(W) x 117(H) x 34(D)
Inner Box (mm)	165(L) x 135(W) x 105(H)
Outer Carton (cm)	43.5(L) x 35.0(W) x 16.0(H)



NH-D7000BP2

1.2V D

Packaging		
Blister	2 pcs/pack	Gross Weight: 19.0 kg
Inner Box	6 packs/box	Volume: 0.0234 cbm
Outer Carton	60 packs/carton	

Dimensions	
Blister (mm)	90(W) x 117(H) x 34(D)
Inner Box (mm)	160(L) x 112(W) x 97(H)
Outer Carton (cm)	34.0(L) x 27.5(W) x 25.0(H)



NH-D2500BP2

1.2V D

Packaging		
Blister	2 pcs/pack	Gross Weight: 11.2 kg
Inner Box	6 packs/box	Volume: 0.0234 cbm
Outer Carton	60 packs/carton	

Dimensions	
Blister (mm)	90(W) x 117(H) x 34(D)
Inner Box (mm)	160(L) x 112(W) x 97(H)
Outer Carton (cm)	34.0(L) x 27.5(W) x 25.0(H)



NH-C3500BP2

1.2V C

Packaging		
Blister	2 pcs/pack	Gross Weight: 16.8 kg
Inner Box	6 packs/box	Volume: 0.0248 cbm
Outer Carton	96 packs/carton	

Dimensions	
Blister (mm)	90(W) x 117(H) x 27(D)
Inner Box (mm)	138(L) x 90(W) x 97(H)
Outer Carton (cm)	41.0(L) x 29.5(W) x 20.5(H)



NH-C2500BP2

1.2V C

Packaging		
Blister	2 pcs/pack	Gross Weight: 16.0 kg
Inner Box	6 packs/box	Volume: 0.0248 cbm
Outer Carton	96 packs/carton	

Dimensions	
Blister (mm)	90(W) x 117(H) x 27(D)
Inner Box (mm)	138(L) x 90(W) x 97(H)
Outer Carton (cm)	41.0(L) x 29.5(W) x 20.5(H)



NH-AA2700BP4

1.2V AA

Packaging		
Blister	4 pcs/pack	Gross Weight: 13.4 kg
Inner Box	12 packs/box	Volume: 0.0144 cbm
Outer Carton	96 packs/carton	

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	29.0(L) x 21.5(W) x 23.0(H)



NH-AA2700BP2

1.2V AA

Packaging		
Blister	2 pcs/pack	Gross Weight: 14.0 kg
Inner Box	12 packs/box	Volume: 0.0274 cbm
Outer Carton	192 packs/carton	

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	41.0(L) x 29.0(W) x 23.0(H)



NH-AA2600BP4

1.2V AA

Packaging		
Blister	4 pcs/pack	Gross Weight: 13.2 kg
Inner Box	12 packs/box	Volume: 0.0144 cbm
Outer Carton	96 packs/carton	

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	29.0(L) x 21.5(W) x 23.0(H)



NH-AA2600BP2

1.2V AA

Packaging		
Blister	2 pcs/pack	Gross Weight: 14.5 kg
Inner Box	12 packs/box	Volume: 0.0274 cbm
Outer Carton	192 packs/carton	

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	41.0(L) x 29.0(W) x 23.0(H)



NH-AA2500BP4

1.2V AA

Packaging		
Blister	4 pcs/pack	Gross Weight: 13.0 kg
Inner Box	12 packs/box	Volume: 0.0144 cbm
Outer Carton	96 packs/carton	

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	29.0(L) x 21.5(W) x 23.0(H)



NH-AA2500BP2

1.2V AA

Packaging		
Blister	2 pcs/pack	Gross Weight: 14.3 kg
Inner Box	12 packs/box	Volume: 0.0274 cbm
Outer Carton	192 packs/carton	

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	41.0(L) x 29.0(W) x 23.0(H)



NH-AA2300BP4

1.2V AA

Packaging		
Blister	4 pcs/pack	Gross Weight: 12.6 kg
Inner Box	12 packs/box	Volume: 0.0144 cbm
Outer Carton	96 packs/carton	

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	29.0(L) x 21.5(W) x 23.0(H)



NH-AA2300BP2

1.2V AA

Packaging		
Blister	2 pcs/pack	Gross Weight: 13.9 kg
Inner Box	12 packs/box	Volume: 0.0274 cbm
Outer Carton	192 packs/carton	

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	41.0(L) x 29.0(W) x 23.0(H)



NH-AA2200BP4

1.2V AA

Packaging		
Blister	4 pcs/pack	Gross Weight: 12.4 kg
Inner Box	12 packs/box	Volume: 0.0144 cbm
Outer Carton	96 packs/carton	

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	29.0(L) x 21.5(W) x 23.0(H)



NH-AA2200BP2

1.2V AA

Packaging		
Blister	2 pcs/pack	Gross Weight: 13.7 kg
Inner Box	12 packs/box	Volume: 0.0274 cbm
Outer Carton	192 packs/carton	

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	41.0(L) x 29.0(W) x 23.0(H)



NH-AA2000BP4

1.2V AA

Packaging		
Blister	4 pcs/pack	Gross Weight: 12.1 kg
Inner Box	12 packs/box	Volume: 0.0144 cbm
Outer Carton	96 packs/carton	

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	29.0(L) x 21.5(W) x 23.0(H)



NH-AA2000BP2

1.2V AA

Packaging		
Blister	2 pcs/pack	Gross Weight: 13.1 kg
Inner Box	12 packs/box	Volume: 0.0274 cbm
Outer Carton	192 packs/carton	

Dimensions	
Blister (mm)	90(W) x 117(H) x 15(D)
Inner Box (mm)	134(L) x 104(W) x 97(H)
Outer Carton (cm)	41.0(L) x 29.0(W) x 23.0(H)



NH-AA1800BP4

1.2V AA

Packaging		
Blister	4 pcs/pack	Gross Weight: 11.8 kg
Inner Box	12 packs/box	Volume: 0.0144 cbm
Outer Carton	96 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 15(D)	
Inner Box (mm)	134(L) x 104(W) x 97(H)	
Outer Carton (cm)	29.0(L) x 21.5(W) x 23.0(H)	



NH-AA1800BP2

1.2V AA

Packaging		
Blister	2 pcs/pack	Gross Weight: 12.7 kg
Inner Box	12 packs/box	Volume: 0.0274 cbm
Outer Carton	192 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 15(D)	
Inner Box (mm)	134(L) x 104(W) x 97(H)	
Outer Carton (cm)	41.0(L) x 29.0(W) x 23.0(H)	



NH-AAA800BP4

1.2V AAA

Packaging		
Blister	4 pcs/pack	Gross Weight: 7.8 kg
Inner Box	12 packs/box	Volume: 0.0168 cbm
Outer Carton	144 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 11(D)	
Inner Box (mm)	125(L) x 84(W) x 97(H)	
Outer Carton (cm)	31.0(L) x 27.0(W) x 20.0(H)	



NH-AAA800BP2

1.2V AAA

Packaging		
Blister	2 pcs/pack	Gross Weight: 7.7 kg
Inner Box	12 packs/box	Volume: 0.0269 cbm
Outer Carton	240 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 11(D)	
Inner Box (mm)	125(L) x 84(W) x 97(H)	
Outer Carton (cm)	51.0(L) x 27.0(W) x 19.5(H)	



NH-AA1500BP4

1.2V AA

Packaging		
Blister	4 pcs/pack	Gross Weight: 10.2 kg
Inner Box	12 packs/box	Volume: 0.0144 cbm
Outer Carton	96 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 15(D)	
Inner Box (mm)	134(L) x 104(W) x 97(H)	
Outer Carton (cm)	29.0(L) x 21.5(W) x 23.0(H)	



NH-AA1500BP2

1.2V AA

Packaging		
Blister	2 pcs/pack	Gross Weight: 11.2 kg
Inner Box	12 packs/box	Volume: 0.0274 cbm
Outer Carton	192 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 15(D)	
Inner Box (mm)	134(L) x 104(W) x 97(H)	
Outer Carton (cm)	41.0(L) x 29.0(W) x 23.0(H)	



NH-AAA600BP4

1.2V AAA

Packaging		
Blister	4 pcs/pack	Gross Weight: 7.8 kg
Inner Box	12 packs/box	Volume: 0.0168 cbm
Outer Carton	144 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 11(D)	
Inner Box (mm)	125(L) x 84(W) x 97(H)	
Outer Carton (cm)	31.0(L) x 27.0(W) x 20.0(H)	



NH-AAA600BP2

1.2V AAA

Packaging		
Blister	2 pcs/pack	Gross Weight: 7.7 kg
Inner Box	12 packs/box	Volume: 0.0269 cbm
Outer Carton	240 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 11(D)	
Inner Box (mm)	125(L) x 84(W) x 97(H)	
Outer Carton (cm)	51.0(L) x 27.0(W) x 19.5(H)	



NH-AAA1100BP4

1.2V AAA

Packaging		
Blister	4 pcs/pack	Gross Weight: 9.8 kg
Inner Box	12 packs/box	Volume: 0.0168 cbm
Outer Carton	144 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 11(D)	
Inner Box (mm)	125(L) x 84(W) x 97(H)	
Outer Carton (cm)	31.0(L) x 27.0(W) x 20.0(H)	



NH-AAA1100BP2

1.2V AAA

Packaging		
Blister	2 pcs/pack	Gross Weight: 9.7 kg
Inner Box	12 packs/box	Volume: 0.0269 cbm
Outer Carton	240 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 11(D)	
Inner Box (mm)	125(L) x 84(W) x 97(H)	
Outer Carton (cm)	51.0(L) x 27.0(W) x 19.5(H)	



NH-9V250BP1

9V Voltage: 8.4V

Packaging		
Blister	1 pcs/pack	Gross Weight: 12.3 kg
Inner Box	12 packs/box	Volume: 0.0385 cbm
Outer Carton	240 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 18(D)	
Inner Box (mm)	135(L) x 125(W) x 97(H)	
Outer Carton (cm)	51.0(L) x 29.0(W) x 26.0(H)	



NH-9V200BP1

9V Voltage: 8.4V

Packaging		
Blister	1 pcs/pack	Gross Weight: 11.6 kg
Inner Box	12 packs/box	Volume: 0.0385 cbm
Outer Carton	240 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 18(D)	
Inner Box (mm)	135(L) x 125(W) x 97(H)	
Outer Carton (cm)	51.0(L) x 29.0(W) x 26.0(H)	



NH-AAA1000BP4

1.2V AAA

Packaging		
Blister	4 pcs/pack	Gross Weight: 8.7 kg
Inner Box	12 packs/box	Volume: 0.0168 cbm
Outer Carton	144 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 11(D)	
Inner Box (mm)	125(L) x 84(W) x 97(H)	
Outer Carton (cm)	31.0(L) x 27.0(W) x 20.0(H)	



NH-AAA1000BP2

1.2V AAA

Packaging		
Blister	2 pcs/pack	Gross Weight: 8.7 kg
Inner Box	12 packs/box	Volume: 0.0269 cbm
Outer Carton	240 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 11(D)	
Inner Box (mm)	125(L) x 84(W) x 97(H)	
Outer Carton (cm)	51.0(L) x 27.0(W) x 19.5(H)	



Ni-Cd Rechargeable Batteries

Like Ni-MH batteries these can be used again and again, but are primarily for moderate to low drain devices including music players, radios and remote controls. Since these batteries contain cadmium please dispose properly after use.



NH-AAA900BP4

1.2V AAA

Packaging		
Blister	4 pcs/pack	Gross Weight: 8.7 kg
Inner Box	12 packs/box	Volume: 0.0168 cbm
Outer Carton	144 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 11(D)	
Inner Box (mm)	125(L) x 84(W) x 97(H)	
Outer Carton (cm)	31.0(L) x 27.0(W) x 20.0(H)	



NH-AAA900BP2

1.2V AAA

Packaging		
Blister	2 pcs/pack	Gross Weight: 8.7 kg
Inner Box	12 packs/box	Volume: 0.0269 cbm
Outer Carton	240 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 11(D)	
Inner Box (mm)	125(L) x 84(W) x 97(H)	
Outer Carton (cm)	51.0(L) x 27.0(W) x 19.5(H)	



NC-D4500BP2

1.2V D

Packaging		
Blister	2 pcs/pack	Gross Weight: 15.6 kg
Inner Box	6 packs/box	Volume: 0.0234 cbm
Outer Carton	60 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 34(D)	
Inner Box (mm)	160(L) x 112(W) x 97(H)	
Outer Carton (cm)	34.0(L) x 27.5(W) x 25.0(H)	



NC-C2500BP2

1.2V C

Packaging		
Blister	2 pcs/pack	Gross Weight: 16.4 kg
Inner Box	6 packs/box	Volume: 0.0248 cbm
Outer Carton	96 packs/carton	

Dimensions		
Blister (mm)	90(W) x 117(H) x 27(D)	
Inner Box (mm)	138(L) x 90(W) x 97(H)	
Outer Carton (cm)	41.0(L) x 29.5(W) x 20.5(H)	

These chargers are designed to help reduce damage to the environment. We own include our new solar charger with USB or solar charging. This unit offers economical charging by using the sun's energy, therefore, reducing electricity consumption.



NC-AA1000BP4

1.2V AA

Packaging
Blister 4 pcs/pack
Inner Box 12 packs/box
Outer Carton 144 packs/carton
Gross Weight: 13.7 kg
Volume: 0.0207 cbm

Dimensions
Blister (mm) 90(W) x 117(H) x 15(D)
Inner Box (mm) 134(L) x 104(W) x 97(H)
Outer Carton (cm) 31.0(L) x 29.0(W) x 23.0(H)



NC-AA1000BP2

1.2V AA

Packaging
Blister 2 pcs/pack
Inner Box 12 packs/box
Outer Carton 240 packs/carton
Gross Weight: 12.8 kg
Volume: 0.0335 cbm

Dimensions
Blister (mm) 90(W) x 117(H) x 15(D)
Inner Box (mm) 134(L) x 104(W) x 97(H)
Outer Carton (cm) 54.1(L) x 28.5(W) x 21.7(H)



NC-AA900BP4

1.2V AA

Packaging
Blister 4 pcs/pack
Inner Box 12 packs/box
Outer Carton 144 packs/carton
Gross Weight: 13.4 kg
Volume: 0.0207 cbm

Dimensions
Blister (mm) 90(W) x 117(H) x 15(D)
Inner Box (mm) 134(L) x 104(W) x 97(H)
Outer Carton (cm) 31.0(L) x 29.0(W) x 23.0(H)



NC-AA900BP2

1.2V AA

Packaging
Blister 2 pcs/pack
Inner Box 12 packs/box
Outer Carton 240 packs/carton
Gross Weight: 10.9 kg
Volume: 0.0335 cbm

Dimensions
Blister (mm) 90(W) x 117(H) x 15(D)
Inner Box (mm) 134(L) x 104(W) x 97(H)
Outer Carton (cm) 54.1(L) x 28.5(W) x 21.7(H)



NC-AA800BP4

1.2V AA

Packaging
Blister 4 pcs/pack
Inner Box 12 packs/box
Outer Carton 144 packs/carton
Gross Weight: 12.2 kg
Volume: 0.0207 cbm

Dimensions
Blister (mm) 90(W) x 117(H) x 15(D)
Inner Box (mm) 134(L) x 104(W) x 97(H)
Outer Carton (cm) 31.0(L) x 29.0(W) x 23.0(H)



NC-AA800BP2

1.2V AA

Packaging
Blister 2 pcs/pack
Inner Box 12 packs/box
Outer Carton 240 packs/carton
Gross Weight: 11.5 kg
Volume: 0.0335 cbm

Dimensions
Blister (mm) 90(W) x 117(H) x 15(D)
Inner Box (mm) 134(L) x 104(W) x 97(H)
Outer Carton (cm) 54.1(L) x 28.5(W) x 21.7(H)



NC-AA600BP4

1.2V AA

Packaging
Blister 4 pcs/pack
Inner Box 12 packs/box
Outer Carton 144 packs/carton
Gross Weight: 11.9 kg
Volume: 0.0207 cbm

Dimensions
Blister (mm) 90(W) x 117(H) x 15(D)
Inner Box (mm) 134(L) x 104(W) x 97(H)
Outer Carton (cm) 31.0(L) x 29.0(W) x 23.0(H)



NC-AA600BP2

1.2V AA

Packaging
Blister 2 pcs/pack
Inner Box 12 packs/box
Outer Carton 240 packs/carton
Gross Weight: 11.5 kg
Volume: 0.0335 cbm

Dimensions
Blister (mm) 90(W) x 117(H) x 15(D)
Inner Box (mm) 134(L) x 104(W) x 97(H)
Outer Carton (cm) 54.1(L) x 28.5(W) x 21.7(H)



NC-AAA300BP4

1.2V AAA

Packaging
Blister 4 pcs/pack
Inner Box 12 packs/box
Outer Carton 144 packs/carton
Gross Weight: 7.0 kg
Volume: 0.0167 cbm

Dimensions
Blister (mm) 90(W) x 117(H) x 11(D)
Inner Box (mm) 125(L) x 84(W) x 97(H)
Outer Carton (cm) 31.0(L) x 27.0(W) x 20.0(H)



NC-9V120BP1

9V Voltage: 8.4V

Packaging
Blister 1 pcs/pack
Inner Box 12 packs/box
Outer Carton 240 packs/carton
Gross Weight: 10.2kg
Volume: 0.0385 cbm

Dimensions
Blister (mm) 90(W) x 117(H) x 18(D)
Inner Box (mm) 135(L) x 125(W) x 97(H)
Outer Carton (cm) 51.0(L) x 29.0(W) x 26.0(H)

SBC3001

Charges:

2 or 4 x AA Ni-MH
2 x AAA Ni-Cd



Solar Charger



Uses sunlight to charge batteries!

Includes USB Power:



USB Charger



Battery Tester



Power Supply



USB

SPECIFICATIONS


Charging Currents
200 mA (for 2 batteries)
100 mA (for 4 batteries)

USB output
DC 5.0V --- 350 mA

MAIN FEATURES

- 3 Independent Charging Channels Charges up to 2 pairs of AA batteries or 1 pair of AAA batteries.
- Reverse Polarity Protection Prevents damage to the charger if the battery is improperly inserted.
- Clean Energy No need to use electricity, just use the sun's rays for power.
- Saves Money Reduces electricity consumption and purchases of single cell batteries.
- USB Ports Use to charge batteries or power your portable electronic devices.

- Compact Lightweight Design Convenient for travel or emergency use.
- Battery Tester Tests rechargeable or primary AA/AAA batteries.



CHARGING TIMES

Type of Battery	Charging Times (Appr.)	
	2 Cells	4 Cells
Ni-MH AA 2000 mAh	12.0 h	24.0 h
Ni-MH AA 1500 mAh	9.0 h	18.0 h
Ni-MH AAA 800 mAh	4.8 h	9.6
Ni-Cd AA1000 mAh	6.0 h	12.0 h
Ni-Cd AA 600 mAh	3.6 h	7.2 h
Ni-Cd AAA 300 mAh	1.8 h	3.6

AVAILABLE COLORS

Black

PACKAGING



Blister	
Weight(g)	218.9
Dimensions (W) x (H) x (D) (mm)	168 x 250 x 83
Inner Carton	
Packs / Inner ctn	8
Net Weight(kg)	1.75
Gross Weight(kg)	2.15
Dimensions (L)x (W) x (H) (cm)	40 x 26 x 18
Outer Carton	
Packs / Carton	16
Net Weight(kg)	3.5
Gross Weight(kg)	4.7
Dimensions (L)x (W) x (H) (cm)	41.5 x 27.5 x 38.5
Volume(M³)	0.0440

> Ultra Fast Chargers

Offer the ultimate in speed charging. In as little as one hour one can use the same batteries again, saving time and money.

BC-0907

Charges:

1-4 × AA

Ni-MH

1-4 × AAA

Ni-Cd



Includes:



AC Adapter

Car Adapter

*Different plug models for different countries

SPECIFICATIONS

AC To DC Adapter

Input Voltage: AC 100 ~ 240V 50/60 Hz
Output Voltage: 12V DC

Car Plug


Output Voltage: 12V DC

Charger

Charging Currents
12V DC Input
4x(1.4V ~ 2200 mA) AA Size
4x(1.4V ~ 800 mA) AAA Size

MAIN FEATURES

- **4 Independent Charging Channels**
- **6 Level Charge Protection**
 - -dv Cut-Off
 - Timer Control Protection (1.5 hours)
 - Over Temperature Protection
 - Reverse Polarity Protection
 - Over Current and Short Circuit Protection
 - Defective and Non-rechargeable Battery Detection
- **Low Current Leakage** Minimizes loss of capacity and maintains battery charge by controlling current leakage.
- **Trickle Charge** maintains battery charge.
- **World Voltage Switch Adapter**
- **Battery Refresh** reduces memory effect and enables full discharge for long battery life.
- **Car Plug Adapter**
- **Pulse Charging Technology** for fast, efficient charging.
- **Easy To Read LCD Display** shows Charging Progress, Defective Battery, Battery Refresh Features.



CHARGING TIMES

Type of Battery	Charging Times (Appr.)
Ni-MH AA 2700 mAh	1.3 h
Ni-MH AA 2000 mAh	1.1 h
Ni-MH AA 1500 mAh	49 min
Ni-MH AAA800 mAh	1.2 h
Ni-Cd AA 1000 mAh	33 min
Ni-Cd AAA 300 mAh	27 min

AVAILABLE COLORS

White Silver

PACKAGING



Blister		
Plug:	TUV	UL
Weight(g)	302	229.5
Dimensions (W) x (H) x (D) (mm)	125 x 205 x 67	125 x 205 x 67
Inner Carton		
Packs / Inner ctn	8	8
Net Weight(kg)	2.42	1.84
Gross Weight(kg)	2.7	2.1
Dimensions (L)x (W) x (H) (cm)	42 x 22 x 14	42 x 22 x 14
Outer Carton		
Packs / Carton	32	32
Net Weight(kg)	9.7	7.4
Gross Weight(kg)	11.3	9
Dimensions (L)x (W) x (H) (cm)	45.4 x 43.5 x 30	45.4 x 43.5 x 30
Volume(M³)	0.0593	0.0593

> Super Fast Chargers

It charges most batteries in 1 to 4 hours. They also offer multiple levels of safety protection and many convenient features, such as LED displays and worldwide use plugs.

BC-1007

Charges:

1-4 × AA


Ni-MH

1-4 × AAA

Ni-Cd



Includes:

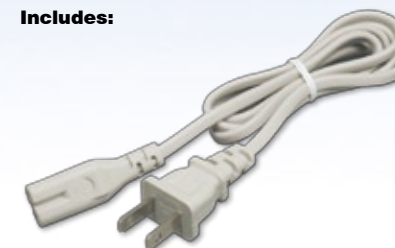

AC Cond

SPECIFICATIONS

Input: AC 100 ~ 240V 50/60 Hz
Output: AA 1000 mA (1-2 pcs); 500 mA (3-4 pcs)
AAA 600 mA (1-2 pcs); 300 mA (3-4 pcs)

MAIN FEATURES

- **Charges 1-4 AA/AAA Ni-MH /Ni-Cd Batteries**
- **6 Levels Charge Protection**
 - -dv Cut Off
 - Over Temperature Protection
 - Timer Control Protection 3.5 hours (1-2 cells) or 7 hours (3-4 cells)
 - Reverse Polarity Protection
 - Over-current and Short Circuit Protection
 - Defective and Non-rechargeable Battery Detection
- **Low Battery Current Leakage**
- **Worldwide Use AC**
100~240V 50/60Hz
- **LED Indicators**

Red	Charging
Red LED Flashing	Defective / Non-rechargeable Battery/ Short circuit
Green	Fully charged/Trickle

CHARGING TIMES

Type of Battery	Charging Times (Appr.)	
	1-2 Cells	3-4 Cells
Ni-MH AA 2700 mAh	2.9 h	5.9 h
Ni-MH AA 2000 mAh	2.4 h	4.8 h
Ni-MH AA 1500 mAh	1.8 h	3.6 h
Ni-MH AAA 800 mAh	1.6 h	3.2 h
Ni-Cd AA 1000 mAh	1.2 h	2.4 h
Ni-Cd AAA 300 mAh	36 min	1.2 h

AVAILABLE COLORS

White

PACKAGING



Blister		
Plug:	TUV	UL
Weight(g)	206.5	166
Dimensions (W) x (H) x (D) (mm)	125 x 205 x 87	125 x 205 x 87
Inner Carton		
Packs / Inner ctn	16	16
Net Weight(kg)	2.3	2.7
Gross Weight(kg)	3.8	3.2
Dimensions (L)x (W) x (H) (cm)	46 x 25.5 x 27	46 x 25.5 x 27
Outer Carton		
Packs / Carton	32	32
Net Weight(kg)	6.45	5.3
Gross Weight(kg)	8	6.7
Dimensions (L)x (W) x (H) (cm)	53 x 47.5 x 29	53 x 47.5 x 29
Volume(M³)	0.0730	0.0730

BC-0903

Charges:

2 or 4 × AA **Ni-MH**
2 or 4 × AAA **Ni-Cd**



Includes:



AC Adapter

USB

SPECIFICATIONS

AC To DC Adapter

Input Voltage: AC 100-240V ~ 50/60Hz
Output Voltage: 12V DC

Car plug

Output Voltage: 12V DC

USB

Output Voltage: 5V DC

Charging Currents

12V DC Input
2x(2.8V ~ 900 mA) AA Size
2x(2.8V ~ 500 mA) AAA Size
5V DC Input
2x(2.8V ~ 500 mA) AA Size
2x(2.8V ~ 300 mA) AAA Size

MAIN FEATURES

- 2 Independent Charging Channels
- 6 Levels Charge Protection
 - -dv Cut-Off
 - Timer Control Protection
 - Over Temperature Protection
 - Reverse Polarity Protection
 - Over Current and Short Circuit Protection
 - Defective and Non-rechargeable Battery Detection

- Low Battery Leakage Current
- Trickle Charge
- Car Plug Adapter and USB Port
- LED Indicators

Red	Charging
Flashing	Defective / Non-rechargeable battery/ Short circuit
Green	Fully charged/trickle

CHARGING TIMES

Type of Battery	Charging Times (Appr.)	
	Input 12V	Input 5V
Ni-MH AA 2700 mAh	3.0 h	6.0 h
Ni-MH AA 2000 mAh	2.7 h	4.8 h
Ni-MH AA 1500 mAh	2.0 h	3.6 h
Ni-MH AAA 800 mAh	1.9 h	3.2 h
Ni-Cd AA 1000 mAh	1.3 h	2.4 h
Ni-Cd AAA 300 mAh	43 min	1.2 h

AVAILABLE COLORS

Grey Silver

PACKAGING



Blister		
Plug:	TUV	UL
Weight(g)	333.5	261
Dimensions (W) x (H) x (D) (mm)	125 x 205 x 67	125 x 205 x 67
Inner Carton		
Packs / Inner ctn	16	16
Net Weight(kg)	5.34	4.18
Gross Weight(kg)	5.8	4.63
Dimensions (L) x (W) x (H) (cm)	43.5 x 27.5 x 23	43.5 x 27.5 x 23
Outer Carton		
Packs / Carton	32	32
Net Weight(kg)	10.7	8.36
Gross Weight(kg)	12.8	10.5
Dimensions (L) x (W) x (H) (cm)	57 x 45 x 25	57 x 45 x 25
Volume(M³)	0.0642	0.0642

BC-0905A

Charges:

1-4 × AA **Ni-MH**
1-4 × AAA **Ni-Cd**



SPECIFICATIONS

Input: AC 100-240V ~ 50/60Hz

Output: AA 1000 mA (1- 2 pcs), 500 mA (3-4 pcs)
AAA 600 mA (1- 2 pcs), 300 mA (3-4 pcs)

MAIN FEATURES


- 4 Independent Charging Channels
- 6 Levels Charge Protection
 - -dv Cut-Off
 - 3.5/7 Timer Control Protection
 - Over Temperature Protection
 - Reverse Polarity Protection
 - Over Current and Short Circuit Protection
 - Defective and Non-rechargeable Battery Detection
- Low Battery Current Leakage
- Trickle Charge

- Switch and Match Plugs with Built-In Switching Adapter for Worldwide Use
- LED Indicators

Red	Charging
Flashing	Defective or non-rechargeable batteries/Short circuit
Green	Fully charged/trickle

CHARGING TIMES

Type of Battery	Charging Times (Appr.)	
	2 Batteries	4 Batteries
Ni-MH AA 2700 mAh	2.9 h	5.9 h
Ni-MH AA 2000 mAh	2.4 h	4.8 h
Ni-MH AA 1500 mAh	1.8 h	3.6 h
Ni-MH AAA 800 mAh	1.6 h	3.2 h
Ni-Cd AA 1000 mAh	1.2 h	2.4 h
Ni-Cd AAA 300 mAh	36 min	1.2 h

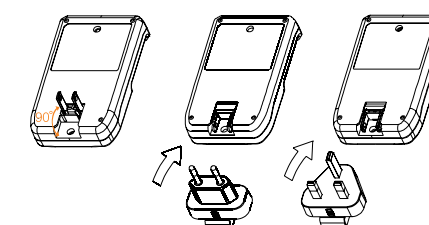

AVAILABLE COLORS

Grey Silver

PACKAGING



Blister		
Plug:	TUV	UL
Weight(g)	170	156
Dimensions (W) x (H) x (D) (mm)	125 x 205 x 70	125 x 205 x 70
Inner Carton		
Packs / Inner ctn	16	16
Net Weight(kg)	2.72	2.5
Gross Weight(kg)	3.2	3.0
Dimensions (L) x (W) x (H) (cm)	48.5 x 22.5 x 27	48.5 x 22.5 x 27
Outer Carton		
Packs / Carton	32	32
Net Weight(kg)	5.44	5
Gross Weight(kg)	8	7.5
Dimensions (L) x (W) x (H) (cm)	51.0 x 47.5 x 30	51.0 x 47.5 x 30
Volume(M³)	0.0730	0.0730

> Fast Chargers

Charge most batteries in 4 to 8 hours. Packed with features, they are handy around the home, at the office and even when traveling.

BC-1002A

BC-1002B

BC-1002C

Charges:

2 or 4 × AA

Ni-MH

2 or 4 × AAA

Ni-Cd




BC-1002C
Only



BC-1002A/B Only



Includes:

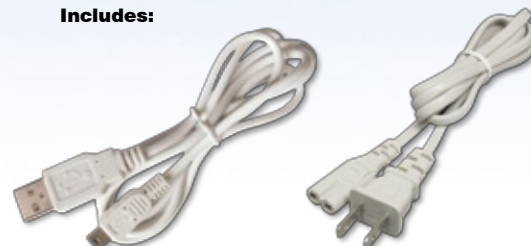

USB(BC-1002C Only)

AC Cord

SPECIFICATIONS

Input: AC 100-240V ~ 50/60Hz
USB input: 5V 500 mA (BC1002C only)
Output: DC 2X(2.8V ± 300 mA)AA Size
DC 2X(2.8V ± 150 mA)AAA Size

MAIN FEATURES

- 2 Independent Charging Channels
- Timer Control (8 hours)
- Over Temperature Protection
- Worldwide Use

- Reverse Polarity Protection
- LED Indicators

Flashing	Charging
On	Fully charged

CHARGING TIMES

Type of Battery	Charging Times (Appr.)
Ni-MH AA 2700 mAh	8.0 h
Ni-MH AA 2000 mAh	8.0 h
Ni-MH AA 1500 mAh	6.0 h
Ni-MH AAA 800 mAh	6.4 h
Ni-Cd AA 1000 mAh	4.0 h
Ni-Cd AAA 300 mAh	2.4 h

AVAILABLE COLORS

☐ White

PACKAGING



Blister		
Plug:	TUV	UL
Weight(g)	200	163
Dimensions (W) x (H) x (D) (mm)	125 x 205 x 85	125 x 205 x 85
Inner Carton		
Packs / Inner ctn	16	16
Net Weight(kg)	3.2	2.6
Gross Weight(kg)	3.7	3.1
Dimensions (L)x (W) x (H) (cm)	46 x 24.5 x 27	46 x 24.5 x 27
Outer Carton		
Packs / Carton	32	32
Net Weight(kg)	6.4	5.2
Gross Weight(kg)	8	6.8
Dimensions (L)x (W) x (H) (cm)	51 x 47.5 x 29	51 x 47.5 x 29
Volume(M³)	0.0703	0.0703

> Fast Chargers

BC-1012

Charges:

1-4 × AA

Ni-MH

1-4 × AAA

Ni-Cd



SPECIFICATIONS

INPUT: AC100-240V~50/60Hz 5W max

Output: DC 1.4V

AA : 400 mA (1~2 Pcs); 260 mA (3Pcs); 200 mA (4 Pcs)

AAA : 200 mA (1~2 Pcs); 130 mA (3Pcs); 100 mA (4 Pcs)

MAIN FEATURES

- **Charges up to 4 AA/AAA Ni-MH/Ni-CD Batteries**
- **Multi-band LCD Monitor** for easy to read status of the charger
- **4 Independent Charging Channels** Four charging slots support any AA/AAA battery combination.
- **Reverse Polarity Protection** A special shell structure prevents incorrect battery insertion, helping avoid damage to the battery and charger.
- **Pulse Charging Technology** Uses a precisely regulated current to maximize the charging efficiency, control battery temperature and increase battery life.
- **Micro Control Unit (MCU)** The MCU enables intelligent charging by automatically identifying non-rechargeable batteries, offering multiple levels of protection including negative delta V(-dv), voltage protection, safety charging cut-offs.
- **Over Current Protection** Charger maintains a constant charging current during the charging cycle.
- **Short Circuit Protection** The MCU detects attempts to charge shorted batteries or directly short the output channels, in which case the LCD indicator flashes.
- **Timer Control** The charger automatically detects the correct charging time, shuts off the charger automatically(1-2 batteries 6 hours), (3 batteries 9 hours), (4 batteries 12 hours).

AVAILABLE COLORS

☐ Silver

MAIN FEATURES

Type of Battery	Charging Times (Appr.)		
	1-2 Cell	3 Cells	4 Cells
Ni-MH AA 2700 mAh	6.0 h	9.0 h	12.0 h
Ni-MH AA 2000 mAh	6.0 h	9.0 h	12.0 h
Ni-MH AAA 1000 mAh	6.0 h	9.0 h	12.0 h
Ni-MH AAA 800 mAh	4.8 h	7.4 h	9.6 h
Ni-Cd AA 1000 mAh	3.0 h	4.5 h	6.0 h
Ni-Cd AAA 300 mAh	1.8 h	2.8 h	3.6 h

PACKAGING



Blister		
Plug:	TUV	UL
Weight(g)	118.2	97.2
Dimensions (W) x (H) x (D) (mm)	125 x 205x 75	125 x 205 x 75
Inner Carton		
Packs / Inner ctn	8	8
Net Weight(kg)	0.95	0.78
Gross Weight(kg)	1.3	1.13
Dimensions (L)x (W) x (H) (cm)	49.5 x 23.5 x 14	49.5 x 23.5 x 14
Outer Carton		
Packs / Carton	32	32
Net Weight(kg)	3.78	3.11
Gross Weight(kg)	5.5	4.83
Dimensions (L)x (W) x (H) (cm)	50.5 x 48.5 x 30	50.5 x 48.5 x 30
Volume(M³)	0.0735	0.0735

BC-1029

Charges:

1-8 × AA Ni-MH

1-8 × AAA Ni-Cd



AC Adapter

SPECIFICATIONS

AC to DC (AC adapter)

Input: 100-240V~50/60Hz

Output: DC12V

DC to DC (Charger)

Input: DC12V

Output: DC 8x(1.4V $\pm$ 500 mA) AA/AAA Size

MAIN FEATURES

- Charges up to 8 AA/AAA Ni-MH Ni-Cd batteries in as fast as 5 hours
- 8 independent charging channels
- LED Charging Display
- 5 Levels Charge Protection
- Low Battery Leakage Current
- Trickle Charge Feature
- Car Plug Option

- (1) -dv cut off
- (2) Timer Control Protection (6 Hours)
- (3) Reverse Polarity Protection
- (4) Over Current and Short Circuit Protection
- (5) Defective and Non-rechargeable battery detection

CHARGING TIMES

Type of Battery	Charging Times (Appr.)
Ni-MH AA 2700 mAh	5.9 h
Ni-MH AA 2000 mAh	4.8 h
Ni-MH AA 1500 mAh	3.6 h
Ni-MH AAA 800 mAh	1.9 h
Ni-Cd AA 1000 mAh	2.4 h
Ni-Cd AAA 300 mAh	40 min

AVAILABLE COLORS

Black Sliver

PACKAGING



Blister		
Plug:	TUV	UL
Weight(g)	420	400
Dimensions (W) x (H) x (D) (mm)	150x 305 x 89.5	150x 305 x 89.5
Inner Carton		
Packs / Inner ctn	4	4
Net Weight(kg)	1.68	1.6
Gross Weight(kg)	1.96	1.88
Dimensions (L)x (W) x (H) (cm)	30.8 x 26 x 16.2	30.8 x 26 x 16.2
Outer Carton		
Packs / Carton	16	16
Net Weight(kg)	6.72	6.4
Gross Weight(kg)	8.5	8.2
Dimensions (L)x (W) x (H) (cm)	54.5 x 32.8 x 35.4	54.5 x 32.8 x 35.4
Volume(M³)	0.0633	0.0633

BC-1014

Charges:

2 or 4 × AA Ni-MH

2 or 4 × AAA Ni-Cd



SPECIFICATIONS

Input: 100-240VAC ~ 60/50Hz 5W max

Output: DC 1x(2.8V $\pm$ 800 mA) 1 Pair AA

DC 2x(2.8V $\pm$ 400 mA) 2 Pairs AA

DC 1x(2.8V $\pm$ 400 mA) 1 Pair AAA

DC 2x(2.8V $\pm$ 200 mA) 2 Pairs AAA

MAIN FEATURES

- 2 Independent Charging Channels
- Timer Control (2 pairs: 6 hours, 1 pair: 3 hours)
- Beeps when charge is complete
- Low Battery Leakage Current Holds Charge Longer
- AA/AAA Reverse Polarity Protection
- Over Temperature Protection
- LED Indicators

Red	Charging
Flashing	Audible alert and flashing

CHARGING TIMES

Type of Battery	Charging Times (Appr.)	
	2 Cell	4 Cell
Ni-MH AA 2700 mAh	3.0 h	6.0 h
Ni-MH AA 2000 mAh	3.0 h	6.0 h
Ni-MH AA 1500 mAh	2.3 h	4.5 h
Ni-MH AAA 800 mAh	2.4 h	4.8 h
Ni-Cd AA 1000 mAh	1.5 h	3.0 h
Ni-Cd AAA 300 mAh	54 min	1.8 h

AVAILABLE COLORS

White

PACKAGING



Blister	
Plug:	TUV
Weight(g)	118.2
Dimensions (W) x (H) x (D) (mm)	125 x 205 x 75
Inner Carton	
Packs / Inner ctn	8
Net Weight(kg)	0.95
Gross Weight(kg)	1.3
Dimensions (L)x (W) x (H) (cm)	49.5 x 23.5 x 14
Outer Carton	
Packs / Carton	32
Net Weight(kg)	3.78
Gross Weight(kg)	5.5
Dimensions (L)x (W) x (H) (cm)	50.5 x 48.5 x 30
Volume(M³)	0.0735

BC-0905B

Charges:

1-4 × AA

Ni-MH

1-4 × AAA

Ni-Cd



SPECIFICATIONS

Input: AC 100-240V ~ 50/60Hz

Output: AA 500 mA (for 1-2 batteries), 250 mA (for 3-4 batteries)

AAA 400 mA (for 1-2 batteries), 200 mA (for 3-4 batteries)

MAIN FEATURES


- 4 Independent Charging Channels
- 5 Levels Charge Protection
 - -dv Cut-Off
 - 14/7 Hours Timer Control Protection
 - Reverse Polarity Protection
 - Over Current and Short Circuit Protection
 - Defective and Non-rechargeable Battery Detection
- Low Battery Current Leakage

- Trickle Charge
- Build-in Switching Adaptor for Worldwide Use
- Voltage Restore
- LED Indicators

Red	Charging
Flashing	Defective or non-rechargeable batteries
Green	Fully charged/Trickle

CHARGING TIMES

Type of Battery	Charging Times (Appr.)	
	2 Batteries	4 Batteries
Ni-MH AA 2700 mAh	5.9 h	11.8 h
Ni-MH AA 2000 mAh	5.0 h	9.6 h
Ni-MH AA 1500 mAh	3.6 h	7.2 h
Ni-MH AAA 800 mAh	2.4 h	4.8 h
Ni-Cd AA 1000 mAh	2.4 h	4.8 h
Ni-Cd AAA 300 mAh	54 min	1.8 h

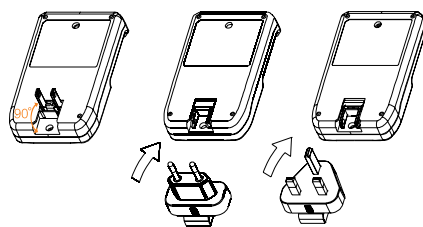

AVAILABLE COLORS

Grey

PACKAGING



Blister		
Plug:	TUV	UL
Weight(g)	170	156
Dimensions (W) x (H) x (D) (mm)	125 x 205 x 70	125 x 205 x 70
Inner Carton		
Packs / Inner ctn	16	16
Net Weight(kg)	2.72	2.5
Gross Weight(kg)	3.2	3.0
Dimensions (L)x (W) x (H) (cm)	48.5 x 22.5 x 27	48.5 x 22.5 x 27
Outer Carton		
Packs / Carton	32	32
Net Weight(kg)	5.44	5.0
Gross Weight(kg)	8	7.5
Dimensions (L)x (W) x (H) (cm)	51 x 47.5 x 30	51 x 47.5 x 30
Volume(M³)	0.0727	0.0727

> Overnight Chargers

These Standard battery chargers are ideal for travel, regular household or office use. Some are also powered by USB ports.

BC-1001A

BC-1001B

Charges:

1-2 × AA

1-2 × AAA

1 × 9V

Ni-MH

Ni-Cd



SPECIFICATIONS

Input: AC 100-240V ~ 50/60Hz

Output: DC 2 x (1.4V ~ 200 mA) AA/AAA Size

DC 1 x (9V ~ 25 mA) 9V Size (BC1001A)

DC 1 x (9V ~ 16 mA) 9V Size (BC1001B)

MAIN FEATURES

- 3 Independent Charging Channels
- 12 Hours Timer Control (BC1001A)
- Reverse Polarity Protection
- Slim and Portable
- Built-in Switching Adaptor for Worldwide Use

- LED Indicators (BC-1001A)

Red	Charging
Off	Fully charged

- LED Indicators (BC-1001B)

Red	Charging or charge complete
-----	-----------------------------

CHARGING TIMES

Type of Battery	Charging Times (Appr.)	
	BC-1001A	BC-1001B
Ni-MH AA 2700 mAh	12.0 h	14.7 h
Ni-MH AA 2000 mAh	12.0 h	12.0 h
Ni-MH AA 1500 mAh	9.0 h	9.0 h
Ni-MH AAA 800 mAh	4.8 h	4.8 h
Ni-MH 9V 200 mAh	9.6 h	15 h
Ni-Cd AA 1000 mAh	6.0 h	6.0 h
Ni-Cd AAA 300 mAh	1.8 h	1.8 h

AVAILABLE COLORS

Black Titanium

PACKAGING



Blister		
Plug:	TUV	UL
Weight(g)	62	55
Dimensions (W) x (H) x (D) (mm)	87 x 172 x 50	87 x 172 x 50
Inner Carton		
Packs / Inner ctn	32	32
Net Weight(kg)	1.98	1.76
Gross Weight(kg)	2.42	2.2
Dimensions (L)x (W) x (H) (cm)	39.5 x 37.5 x 18	39.5 x 37.5 x 18
Outer Carton		
Packs / Carton	64	64
Net Weight(kg)	4.0	3.52
Gross Weight(kg)	7.5	6.8
Dimensions (L)x (W) x (H) (cm)	41 x 39 x 39	41 x 39 x 39
Volume(M³)	0.0624	0.0624

BC-1009

Charges:

1-2 x AA

Ni-MH

1-2 x AAA

Ni-Cd



SPECIFICATIONS

Input: AC 100-240V ~ 50/60Hz 3W max
Output: DC 2 x (1.4V $\pm$ 150 mA)

MAIN FEATURES

- 2 Independent Charging Channels
- Reverse Polarity Protection to prevent incorrect battery insertion
- Low Battery Current Leakage Feature Minimizes

- loss of capacity and maintains battery charge by controlling current leakage
- Comfortable shell case design molds to your hand – no sharp edges
- 2 LED Indicators

Red Charging

CHARGING TIMES

Type of Battery	Charging Times (Appr.)
Ni-MH AA 2700 mAh	19.6 h
Ni-MH AA 2000 mAh	16.0 h
Ni-MH AA 1500 mAh	12.0 h
Ni-MH AAA 800 mAh	6.4 h
Ni-Cd AA 1000 mAh	8.0 h
Ni-Cd AAA 300 mAh	2.4 h

AVAILABLE COLORS

White

Black

Silver

PACKAGING



Blister		
Plug:	TUV	UL
Weight(g)	75	65
Dimensions (W) x (H) x (D) (mm)	90 x 172 x 72	90 x 172 x 50
Inner Carton		
Packs / Inner ctn	16	16
Net Weight(kg)	1.2	1.04
Gross Weight(kg)	1.6	1.35
Dimensions (L)x (W) x (H) (cm)	41.5 x 20 x 22.5	36 x 20 x 20
Outer Carton		
Packs / Carton	32	32
Net Weight(kg)	2.4	2.08
Gross Weight(kg)	3.5	3.2
Dimensions (L)x (W) x (H) (cm)	43 x 42 x 24.5	42 x 37.5 x 22
Volume(M ³)	0.0443	0.0347

BC-1013

Charges:

2 or 4 x AA

Ni-MH

2 or 4 x AAA

Ni-Cd



SPECIFICATIONS

Input: AC 100 - 240V ~ 50/60 Hz 5W max
Output: DC (2.8V $\pm$ 400 mA) 1 Pair AA/AAA
DC (2.8V $\pm$ 200 mA) 2 Pairs AA/AAA

MAIN FEATURES

- 2 independent Charging Channels
- Low battery leakage current holds charge longer
- Reverse Polarity Protection
- Multi-Band LED monitor tracks charge progress

4 LED Indicators

1 LED band	25%
2 LED band	55%
3 LED band	75%
4 LED band	Fully charged/Trickle

CHARGING TIMES

Type of Battery	Charging Times (Appr.)	
	2 Cells	4 Cells
Ni-MH AA 2700 mAh	7.4 h	14.7 h
Ni-MH AA 2000 mAh	6.0 h	12.0 h
Ni-MH AA 1500 mAh	4.5 h	9.0 h
Ni-MH AAA 800 mAh	2.4 h	4.8 h
Ni-Cd AA 1000 mAh	3.0 h	6.0 h
Ni-Cd AAA 300 mAh	54 min	1.8 h

AVAILABLE COLORS

White

PACKAGING



Blister	
Plug:	TUV
Weight(g)	118.2
Dimensions (W) x (H) x (D) (mm)	125 x 205 x 75
Inner Carton	
Packs / Inner ctn	8
Net Weight(kg)	0.95
Gross Weight(kg)	1.3
Dimensions (L)x (W) x (H) (cm)	49.5 x 23.5 x 14
Outer Carton	
Packs / Carton	16
Net Weight(kg)	3.78
Gross Weight(kg)	5.5
Dimensions (L)x (W) x (H) (cm)	50.5 x 48.5 x 30
Volume(M ³)	0.0735

BC-1021C

Charges:

1-2 x AA

Ni-MH

1-2 x AAA

Ni-Cd



SPECIFICATIONS

INPUT: AC100~240V 50/60Hz 5W
Output: DC 2 x (1.4V $\pm$ 200 mA)AA Size
DC 2 x (1.4V $\pm$ 100 mA)AAA Size

MAIN FEATURES

- Charges 1 or 2 Ni-MH/Ni-Cd AA/AAA batteries
- Reverse Polarity Protection Specially designed slots prevent incorrect polarity insertion of the batteries.
- Timer Control Protection (12 Hrs) The charger automatically detects the correct charging time and after 12 hrs the main charging current switches to a trickle current.
- Low Charge Current for Longer Battery Life
- Low Battery Leakage Current If the battery charger is not connected to input power and batteries are left in the charger, battery discharge will be controlled using the lowest possible, pre-determined current.
- 2 LED Indicators

Red	Charging
Green	Fully charged/Trickle

CHARGING TIMES

Type of Battery	Charging Times (Appr.)
Ni-MH AA 2000 mAh	12.0 h
Ni-MH AA 1500 mAh	9.0 h
Ni-MH AAA 800 mAh	9.6 h
Ni-Cd AA 1000 mAh	6.0 h
Ni-Cd AAA 300 mAh	3.6 h

AVAILABLE COLORS

White

PACKAGING



Blister		
Plug:	TUV	UL
Weight(g)	105	83
Dimensions (W) x (H) x (D) (mm)	100 x 180 x 46	100 x 180 x 46
Inner Carton		
Packs / Inner ctn	32	32
Net Weight(kg)	3.36	2.66
Gross Weight(kg)	3.7	3.0
Dimensions (L)x (W) x (H) (cm)	41.8 x 27 x 22.5	41.8 x 27 x 22.5
Outer Carton		
Packs / Carton	64	64
Net Weight(kg)	6.7	5.3
Gross Weight(kg)	8.3	6.9
Dimensions (L)x (W) x (H) (cm)	43 x 28.2 x 49.8	43 x 28.2 x 49.8
Volume(M ³)	0.0604	0.0604

BC-0901 BC-0901SMT

Charges:

1-2 x AA

Ni-MH

1-2 x AAA

Ni-Cd



SPECIFICATIONS

Input: AC 120V ~ 60Hz or 230V ~ 50Hz (BC-0901)
AC 100-240V ~ 50/60Hz (BC-0901SMT)
Output: DC 2x (1.4V $\pm$ 100 mA) AA/AAA size (BC-0901)
DC 2x (1.4V $\pm$ 360 mA) AA size (BC-0901SMT)
DC 2x (1.4V $\pm$ 150 mA) AAA size (BC-0901SMT)

MAIN FEATURES

- 2 Independent Channels
- 6.5 Hours Timer Control (BC-0901SMT)
- Reverse Polarity Protection

LED Indicators

Red	Charging or charge complete
Green	Fully Charged (BC-0901SMT only)

CHARGING TIMES

Type of Battery	Charging Times (Appr.)	
	BC-0901	BC-0901SMT
Ni-MH AA 2700 mAh	29.4 h	6.5 h
Ni-MH AA 2000 mAh	24.0 h	6.5 h
Ni-MH AA 1500 mAh	18.0 h	5.0 h
Ni-MH AAA 800 mAh	9.6 h	6.4 h
Ni-Cd AA 1000 mAh	12.0 h	3.3 h
Ni-Cd AAA 300 mAh	3.6 h	2.4 h

AVAILABLE COLORS

Grey Silver

PACKAGING



Blister		
Plug:	TUV	UL
Weight(g)	155	133
Dimensions (W) x (H) x (D) (mm)	125 x 205 x 80	125 x 205 x 80
Inner Carton		
Packs / Inner ctn	16	16
Net Weight(kg)	2.48	2.13
Gross Weight(kg)	2.73	2.53
Dimensions (L)x (W) x (H) (cm)	39.5 x 23.5 x 12.5	39.5 x 23.5 x 20
Outer Carton		
Packs / Carton	32	32
Net Weight(kg)	4.96	4.3
Gross Weight(kg)	7.2	6.6
Dimensions (L)x (W) x (H) (cm)	48.5 x 41 x 27	48.5 x 41 x 23
Volume(M ³)	0.0537	0.0458

BC-0902

Charges:

2 or 4 × AA

Ni-MH

2 or 4 × AAA

Ni-Cd



SPECIFICATIONS

Input: AC 120V ~ 60Hz or 230V ~ 50Hz
Output: DC 2x (2.8V $\Rightarrow$ 200 mA) AA Size
DC 2x(2.8V $\Rightarrow$ 120 mA) AAA Size

MAIN FEATURES

- 2 Independent Channels
- LED Indicators
- Reverse Polarity Protection

Red Charging or charge complete

CHARGING TIMES

Type of Battery	Charging Times (Appr.)
Ni-MH AA 2700 mAh	14.7 h
Ni-MH AA 2000 mAh	12.0 h
Ni-MH AA 1500 mAh	9.0 h
Ni-MH AAA 600 mAh	6.0 h
Ni-Cd AA 1000 mAh	6.0 h
Ni-Cd AAA 300 mAh	3.0 h

AVAILABLE COLORS

Grey Silver

PACKAGING



Blister		
Plug:	TUV	UL
Weight(g)	274	187
Dimensions (W) x (H) x (D) (mm)	210 x 130 x 82	210 x 130 x 66
Inner Carton		
Packs / Inner ctn	4	8
Net Weight(kg)	1.1	1.5
Gross Weight(kg)	1.3	1.75
Dimensions (L)x (W) x (H) (cm)	39 x 37.5 x 19	41.5 x 21.5 x 13.5
Outer Carton		
Packs / Carton	16	16
Net Weight(kg)	4.4	3
Gross Weight(kg)	5.9	4.5
Dimensions (L)x (W) x (H) (cm)	41 x 39.5 x 40.5	43 x 23 x 29.5
Volume(M³)	0.0454	0.0292

BC-0904S BC-0904T BC-0904SM

Charges:

2 or 4 × AA

2 or 4 × AAA

1-2 × 9V

Ni-MH

Ni-Cd



SPECIFICATIONS

Input: AC 120V-60Hz or AC 230V 50Hz (BC-0904S/ T)
100-240V ~ 50/60Hz (BC-0904SM)
Output: (BC-0904S/SM) DC 2 x (2.8V $\Rightarrow$ 160 mA) AA size
DC 2 x (2.8V $\Rightarrow$ 80 mA) AAA size
DC 2 x (9V $\Rightarrow$ 25 mA) 9V size
(BC-0904 T) DC 2 x (2.8V $\Rightarrow$ 250 mA) AA size
DC 2 x (2.8V $\Rightarrow$ 120 mA) AAA size
DC 2 x (9V $\Rightarrow$ 25 mA) 9V size

MAIN FEATURES

- 2 independent Charging Channels
- 10 Hours Timer Control (BC-0904T)
- Low Charge Current for Longer Battery Life
- Reverse Polarity Protection
- LED Indicators

Red Charging or charge complete

CHARGING TIMES

Type of Battery	Charging Times (Appr.)	
	BC-0904S/SM	BC-0904T
Ni-MH AA 2000 mAh	15.0 h	9.6 h
Ni-MH AA 1500 mAh	11.0 h	7.0 h
Ni-MH AAA 800 mAh	12.0 h	8.0 h
Ni-Cd AA 1000 mAh	7.5 h	4.8 h
Ni-Cd AAA 300 mAh	4.5 h	3.0 h
Ni-MH 9V 200 mAh	9.6 h	9.6 h

AVAILABLE COLORS

Grey Silver

PACKAGING



Blister		
Plug:	TUV	UL
Weight(g)	274	187.5
Dimensions (W) x (H) x (D) (mm)	210 x 130 x 84	210 x 130 x 66
Inner Carton		
Packs / Inner ctn	4	8
Net Weight(kg)	1.1	1.5
Gross Weight(kg)	1.3	1.75
Dimensions (L)x (W) x (H) (cm)	39 x 37.5 x 19	41.5 x 21.5 x 13.5
Outer Carton		
Packs / Carton	16	16
Net Weight(kg)	4.4	3
Gross Weight(kg)	5.9	4.5
Dimensions (L)x (W) x (H) (cm)	41 x 39.5 x 40.5	43 x 23 x 29.5
Volume(M³)	0.0656	0.0292

BC-0908

Charges:

1-4 × AA Ni-MH
1-4 × AAA Ni-Cd



SPECIFICATIONS

Input: AC 120V ~ 60Hz or 230V ~ 50Hz
Output: 4x(1.4V $\pm$ 120 mA) AA Size
4X(1.4V $\pm$ 70 mA) AAA Size

MAIN FEATURES

- 4 Independent Channels
- Reverse Polarity Protection
- LED Indicators

Red Charging or charge complete

CHARGING TIMES

Type of Battery	Charging Times (Appr.)
Ni-MH AA 2700 mAh	24.5 h
Ni-MH AA 2000 mAh	20.0 h
Ni-MH AA 1500 mAh	15.0 h
Ni-MH AAA 800 mAh	8.0 h
Ni-Cd AA 1000 mAh	10.0 h
Ni-Cd AAA 300 mAh	5.1 h

AVAILABLE COLORS

Grey Silver

PACKAGING



Blister		
Plug:	TUV	UL
Weight(g)	208	170
Dimensions (W) x (H) x (D) (mm)	125 x 205 x 52	125 x 205 x 52
Inner Carton		
Packs / Inner ctn	8	8
Net Weight(kg)	1.7	1.36
Gross Weight(kg)	1.96	1.62
Dimensions (L)x (W) x (H) (cm)	42.5 x 22.5 x 13.5	42.5 x 22.5 x 13.5
Outer Carton		
Packs / Carton	32	32
Net Weight(kg)	6.7	5.4
Gross Weight(kg)	8.5	7.3
Dimensions (L)x (W) x (H) (cm)	46.5 x 44 x 29	46.5 x 44 x 29
Volume(M ³)	0.0594	0.0594

BC-0803

Charges:

1-2 × AA Ni-MH
1-2 × AAA Ni-Cd



Pocket Emergency Power!

Includes:



USB

SPECIFICATIONS


Input: DC 5V $\pm$ 500 mA
Output: DC 2 x (1.4V $\pm$ 220 mA) AA size
DC 2 x (1.4V $\pm$ 100 mA) AAA size

MAIN FEATURES

- 2 Independent Charging Channels
- Powered by 5V USB port, Nokia mobile phone charger or MP3 charger
- LED Indicators

Red Charging or charge complete

USAGE DIRECTIONS

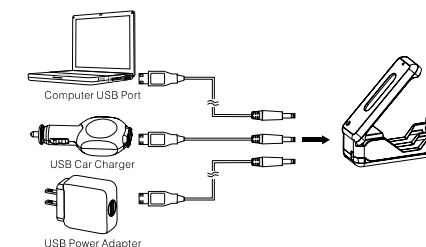

CHARGING TIMES

Type of Battery	Charging Times (Appr.)
Ni-MH AA 2700 mAh	13.4 h
Ni-MH AA 2000 mAh	10.9 h
Ni-MH AA 1500 mAh	8.2 h
Ni-MH AAA 800 mAh	9.6 h
Ni-Cd AA 1000 mAh	5.5 h
Ni-Cd AAA 300 mAh	3.6 h

AVAILABLE COLORS

White

PACKAGING



Blister	
Weight(g)	85
Dimensions (W) x (H) x (D) (mm)	115 x 195 x 45
Inner Carton	
Packs / Inner ctn	24
Net Weight(kg)	2.04
Gross Weight(kg)	2.48
Dimensions (L)x (W) x (H) (cm)	37 x 34 x 21
Outer Carton	
Packs / Carton	48
Net Weight(kg)	4.1
Gross Weight(kg)	6.1
Dimensions (L)x (W) x (H) (cm)	38.5 x 35.5 x 45
Volume(M ³)	0.0615

These can recharge many types of batteries and are perfect for high battery usage households. They are reliable and safe and can even test your batteries to see if its time for a recharge.

AC-8201

Charges:

1-2 x AA

1-2 x AAA



Ni-MH

Ni-Cd

Alkaline



SPECIFICATIONS

Input : DC5V, 500mA Max

Charging current:

200mA (AA/AAA Ni-MH batteries)
50mA (AA/AAA Alkaline batteries)

MAIN FEATURES

Battery Type

Suitable for Ni-MH AA/AAA batteries, Alkaline batteries.

Timer Control Protection

The charger automatically detects the correct charging time and the main charging current changes to a trickle current. The charger always shuts off the main charging current and switches to trickle charge after a certain time. (Ni-MH / Ni-Cd batteries: (AA) 12 hours , (AAA) 6 hours. Alkaline batteries: (AA) 30 hours, (AAA) 15 hours.)

Ni-MH Batteries

The high sensitivity -dv detector stops

charging once it detects the batteries are fully charged. The batteries are of low heat during charging, and batteries can be fully charged. It will effectively prevent overcharge and shorter charge, improving the battery circulation service life and ensure its discharge time.

Alkaline batteries

The built-in detector stops charging once it detects the battery's voltage is reaching to the determined maximum control voltage (1.70V). It will prevent the battery from being overcharged.

AVAILABLE COLORS

Grey

CHARGING TIMES

Type of Battery	Charging Times (Appr.)
Ni-MH AA 2700 mAh	14.7 h
Ni-MH AA 2000 mAh	12.0 h
Ni-MH AA 1500 mAh	9.0 h
Ni-MH AAA 800 mAh	4.8 h
Ni-Cd AA 1000 mAh	6.0 h
Ni-Cd AAA 300 mAh	1.8 h

PACKAGING



Blister	
Weight(g)	/
Dimensions (W) x (H) x (D) (mm)	/
Inner Carton	
Packs / Inner ctn	/
Net Weight(kg)	/
Gross Weight(kg)	/
Dimensions (L)x (W) x (H) (cm)	/
Outer Carton	
Packs / Carton	/
Net Weight(kg)	/
Gross Weight(kg)	/
Dimensions (L)x (W) x (H) (cm)	/
Volume(M³)	/

BC-0906S

Charges:

1-4 x AA

1-4 x AAA

1-4 x D or C


1-2 x 9V

1-2 x 9V

1-2 x 9V

Ni-MH

Ni-Cd

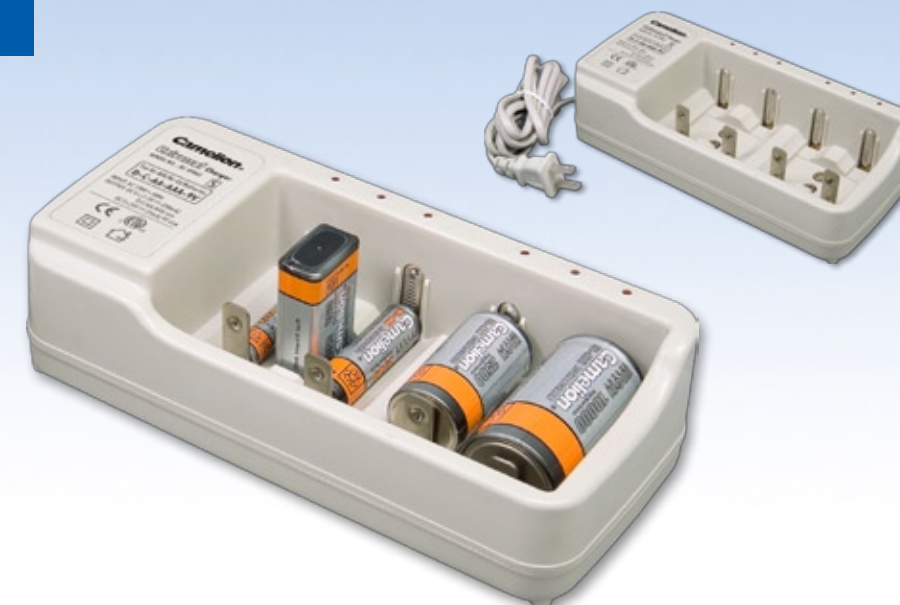

SPECIFICATIONS

BC-0906S

Input: AC 110-120V ~ 60Hz or 220-240 ~ 50Hz
Output: DC 4x (1.4V ~ 250 mA) D/C/AA/AAA Size
2x (9V ~ 25 mA) 9V Size

BC-0906SMT

Input: AC 100-240V ~ 50/60Hz
Output: DC 4x (1.4V ~ 360 mA) D/C/AA/AAA Size
2x (9V ~ 25 mA) 9V Size

MAIN FEATURES

BC-0906S

- 6 Independent Charging Channels
- Reverse Polarity Protection
- LED Indicators

Red	Charging or charge complete
-----	-----------------------------

CHARGING TIMES

Type of Battery	Charging Times (Appr.)
BC-0906S	
Ni-MH AA 2500 mAh	11.0 h
Ni-MH AA 2000 mAh	9.6 h
Ni-MH AA 1500 mAh	7.0 h
Ni-MH AAA 600 mAh	3.0 h
Ni-Cd AA 1000 mAh	4.8 h
Ni-Cd AAA 300 mAh	1.5 h
Ni-MH C 1800 mAh	9.0 h
Ni-MH D 2500 mAh	12.0 h
Ni-MH 9V 200 mAh	10.0 h

AVAILABLE COLORS

Grey Silver

PACKAGING



Blister		
Plug:	TUV	UL
Weight(g)	630	610
Dimensions (W) x (H) x (D) (mm)	130 x 295 x 101	130 x 295 x 101
Inner Carton		
Packs / Inner ctn	8	8
Net Weight(kg)	5.04	4.9
Gross Weight(kg)	5.56	5.42
Dimensions (L)x (W) x (H) (cm)	31.3 x 31.0 x 14.3	31.3 x 31.0 x 14.3
Outer Carton		
Packs / Carton	16	16
Net Weight(kg)	10.1	9.8
Gross Weight(kg)	12.3	12
Dimensions (L)x (W) x (H) (cm)	64.5 x 33.3 x 31.5	64.5 x 33.3 x 31.5
Volume(M³)	0.0677	0.0677

LBC-308

Charges:

Most 3.7V or 7.4V Batteries*

Li-ion



Includes:



AC Adapter

Car Adapter

LBC-312

Charges:

Most 1.2V 3.7V or 7.4V Batteries*

Li-ion

Ni-MH

Ni-Cd



Includes:



AC Cord

USB

SPECIFICATIONS

Charger

Charging Current: 600 mA (max) at constant current mode.

Output: Fixed voltage (4.2V for 3.7V battery, 8.4V for 7.4V battery)

Safety Timer: 10 hours

AC/DC Adapter

Input: AC 100~240V, 50/60Hz

Output: DC 12V $\pm$ 500 mA

Car Adapter

Input: 12V DC

MAIN FEATURES

• Supports Many Devices

Compatible with almost all 3.7V and 7.4V Li-ion batteries for devices such as digital cameras, camcorders, mobile phones, MP3 /MP4 players, game players*

• **Multiple Brands** Supports devices from Canon, Casio, Fuji, GP, Hitachi, JVC, Kodak, Kyocera, Minolta, Nikon, Olympus, Optex, Panasonic, Pentax, Polaroid, Ricoh, Sanyo, Sony, Toshiba and many more brands.

• **Automatic Voltage/Polarity Selection** Microprocessor core identifies battery type and +/- polarity, making it easy for you to use

• Compatible with Old and New Li-ion Batteries

• Fast and Precise Charging

Microprocessor fast charging with automatic charge current control and a top-up charging phase with over charge protection*

• **Safe** Faulty battery detection and 10 hours safety timer

• **Elegant Design** No clunky additional adapter plates

• **Portable** Lightweight design and worldwide voltage input and adapter plugs for easy traveling

• **Vehicle Ready Car Plug**

• **2 LED Indicators**

Green	Red	Condition
OFF	OFF	No power or faulty power supply
OFF	ON	Power on
ON	ON	Fully charged
Flashing	ON	Battery charging
Flashing	Flashing	Faulty battery or charging process stopped by safety timer

CHARGING TIMES

Battery Capacity	Charging Times
600 mAh	90 mins
1000 mAh	130 mins
1400 mAh	1800 mins
1800 mAh	220 mins
2200 mAh	260 mins

AVAILABLE COLORS

Black

PACKAGING



Blister		
Plug:	TUV	UL
Weight(g)	181.5	145
Dimensions (W) x (H) x (D) (mm)	108 x 338 x 62	108 x 338 x 62
Inner Carton		
Packs / Inner ctn	10	10
Net Weight(kg)	1.82	1.45
Gross Weight(kg)	2.15	1.78
Dimensions (L)x (W) x (H) (cm)	58.2 x 20 x 13.5	58.2 x 20 x 13.5
Outer Carton		
Packs / Carton	40	40
Net Weight(kg)	7.26	5.8
Gross Weight(kg)	10.9	9.4
Dimensions (L)x (W) x (H) (cm)	59.7 x 41.2 x 28.6	59.7 x 41.2 x 28.6
Volume(M ³)	0.0704	0.0704

SPECIFICATIONS

Charger

Input: 100-240V AC 50/60Hz

Output: Charging Current: Lithium batteries Fixed voltage (3.7V battery, 800mA-max; 7.4V battery 600mA-max; trickle charge is 70mA)

Output: Ni-MH/Ni-Cd cells DC 2x(1.4V $\pm$ 700 mA max), -dv cut off(-10mV)

USB Port

USB Output: DC 5.3V $\pm$ 600 mA max

MAIN FEATURES

• **Supports Many Devices** Compatible with almost all 3.7V and 7.4V Li-ion, 1.2V Ni-MH and Ni-CD batteries for such devices as digital cameras, Camcorders, mobile phones, MP3 /MP4 players, game players and more.

• **Automatic Voltage/Polarity Selection** Microprocessor core identifies battery type and +/- polarity, making it easy for you to use.

• **Safe** Faulty battery detection; 5 hours safety timer for Ni-MH/Cd and 10 hours safety timer for Li-ion.

• Convenient Design

• **Portable** Lightweight design and worldwide voltage input and adapter plugs for easy traveling.

• **USB output port** for iPhone, iPod, Andriod Smartphone, MP3, MP4 GPS devices and more.

CHARGING TIMES

Battery Capacity	Charging Times
Ni-MH AA 2700 mAh	4.2 h
Ni-MH AA 2000 mAh	3.43 h
Ni-MH AA 1500 mAh	2.58 h
Ni-MH AAA 800 mAh	1.38 h
Ni-Cd AA 1000 mAh	1.72 h
Ni-Cd AAA 300 mAh	0.52 h

AVAILABLE COLORS

Black

PACKAGING



Blister	
Plug:	TUV
Weight(g)	179
Dimensions (W) x (H) x (D) (mm)	185 x 128 x 70
Inner Carton	
Packs / Inner ctn	10
Net Weight(kg)	1.79
Gross Weight(kg)	2.14
Dimensions (L)x (W) x (H) (cm)	56.5 x 20.6 x 13.5
Outer Carton	
Packs / Carton	40
Net Weight(kg)	7.16
Gross Weight(kg)	10.6
Dimensions (L)x (W) x (H) (cm)	58 x 42.7 x 29
Volume(M ³)	0.0719

Battery Charging Table

Directions: The following table lists out charging times for specific Camelion chargers and batteries. For example, to find the charging time for the BC-1009 charger using a Nickel Metal Hydride AA2200 (NH-AA2200) battery, first locate the BC-1009 column. Then locate the NH-AA2200 row. Finally, the point of intersection indicates the value, which is 17.6 hours.

Camelion Model	SBC3001		BC-0907	BC-1007		BC-0903		BC-0905A		BC-1002A	BC-1012			BC-1029	BC-1014	
	2 cells	4 cells	DC in 12V, 1.5A	1-2 cells	3-4 cells	DC in 12V,1A	DC in 5V,1A	2 cells	4 cells	BC-1002B	1-2 cells	3 cells	4 cells		2 cells	4 cells
										BC-1002C						
Timer Control	NA	NA	1.5h	NA	NA	3.0h	6.0h	3.5h	7.0h	NA	6.0h	9.0h	12h	NA	3.0h	6.0h
Ni-MH Batteries																
NH-D2500	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
NH-C2500	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
NH-AA2700	14.7h	29.4h	1.34h	2.9h	5.9h	T/C 3.0h	T/C 5.9h	2.9h	5.9h	9.8h	T/C 6.0h	T/C 9.0h	T/C 12h	5.9h	T/C 3.0h	T/C 6.0h
NH-AA2600	14.1h	28.2h	1.28h	2.8h	5.6h	T/C 3.0h	T/C 5.6h	2.8h	5.6h	9.4h	T/C 6.0h	T/C 9.0h	T/C 12h	5.6h	T/C 3.0h	T/C 6.0h
NH-AA2500	13.8h	27.6h	1.25h	2.8h	5.6h	T/C 3.0h	5.5h	2.8h	5.6h	9.2h	T/C 6.0h	T/C 9.0h	T/C 12h	5.5h	T/C 3.0h	T/C 6.0h
NH-AA2300	13.8h	27.6h	1.25h	2.8h	5.6h	3.0h	5.5h	2.8h	5.5h	9.2h	T/C 6.0h	T/C 9.0h	T/C 12h	5.5h	T/C 3.0h	T/C 6.0h
NH-AA2200	13.2h	26.4h	1.2h	2.6h	5.2h	2.9h	5.3h	2.6h	5.2h	8.8h	T/C 6.0h	T/C 9.0h	T/C 12h	5.3h	T/C 3.0h	T/C 6.0h
NH-AA2000	12.0h	24.0h	1.1h	2.4h	4.8h	2.7h	4.8h	2.4h	4.8h	8.0h	T/C 6.0h	T/C 9.0h	T/C 12h	4.8h	3.0h	6.0h
NH-AA1800	10.8h	21.6h	1.0h	2.2h	4.4h	2.4h	4.3h	2.2h	4.4h	7.2h	5.4h	8.3h	10.8h	4.3h	2.7h	5.4h
NH-AA1500	9.0h	18.0h	49min	1.8h	3.6h	2.0h	3.6h	1.8h	3.6h	6.0h	4.5h	6.9h	9.0h	3.6h	2.3h	4.5h
NH-AAA1100	5.7h	11.4h	1.4h	1.9h	3.8h	2.3h	3.8h	1.9h	3.8h	7.6h	T/C 6.0h	T/C 9.0h	T/C 12h	2.6h	2.9h	5.7h
NH-AAA1000	5.1h	10.2h	1.3h	1.7h	3.4h	2.0h	3.4h	1.7h	3.4h	6.8h	T/C 6.0h	T/C 9.0h	T/C 12h	2.4h	2.6h	5.1h
NH-AAA900	4.8h	9.6h	1.2h	1.6h	3.2h	1.9h	3.2h	1.6h	3.2h	6.4h	5.4h	8.3h	10.8h	2.2h	2.4h	4.8h
NH-AAA800	4.8h	9.6h	1.2h	1.6h	3.2h	1.9h	3.2h	1.6h	3.2h	6.4h	4.8h	7.3h	9.6h	1.9h	2.4h	4.8h
NH-AAA600	3.6h	7.2h	54min	1.2h	2.4h	1.4h	2.4h	1.2h	2.4h	4.8h	3.6h	5.5h	7.2h	1.4h	1.8h	3.6h
NH-9V250	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
NH-9V200	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ni-Cd Batteries																
NC-D1600	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
NC-C1600	NA	NA	NA	1.2h	2.4h	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
NC-AA1000	6.0h	12.0h	33min	1.2h	2.4h	1.3h	2.4h	1.2h	2.4h	4.0h	3.0h	4.6h	6.0h	2.4h	1.5h	3.0h
NC-AA900	5.4h	10.8h	30min	1.1h	2.2h	1.2h	2.2h	1.1h	2.2h	3.6h	2.7h	4.2h	5.4h	2.2h	1.4h	2.7h
NC-AA800	4.8h	9.6h	26min	1.0h	2.0h	1.1h	2.0h	1.1h	2.0h	3.2h	2.4h	3.7h	4.8h	1.9h	1.2h	2.4h
NC-AA600	3.6h	7.2h	20min	0.7h	1.4h	48min	1.4h	42min	1.4h	2.4h	1.8h	3.1h	3.6h	1.4h	54min	1.8h
NC-AAA300	1.8h	3.6h	27min	0.6h	1.2h	33min	1.2h	36min	1.2h	2.4h	1.8h	2.8h	3.6h	42min	54min	1.8h
NC-9V120	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

Notes: NA - Not Applicable. T/C: Charger has timer control. This is the cut off time, whether the battery is fully charged or not.. All the data is based on Camelion latest lab tests. Charging times may vary based upon temperature, product age, voltage and other conditions. This data sheet is for customer reference purposes only and to help customers choose the appropriate product. Contents do not constitute a warranty. For information on specific Camelion products please visit our website at www.camelionbattery.com or contact us directly at info@camelionbattery.com.

Camelion Model	BC-0905B		BC-1001A	BC-1001B	BC-1009	BC-1013		BC-1021C	BC-0901	BC-0901SMT	BC-0902	BC-0904S/SM	BC-0904T	BC-0908	BC-0906S	AC8201
	2 cells	4 cells				2 cells	4 cells									
Timer Control	7.0h	14.0h	Voltage Cut Off	NA	NA	NA	NA	12h	NA	6.5h	NA	NA	10.0h	NA	NA	
Ni-MH Batteries																
NH-D2500	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	12.0h	NA
NH-C2500	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	12.0h	NA
NH-AA2700	5.9h	11.8h	T/C 12.0h	14.7h	19.6h	7.4h	14.7h	T/C 12.0h	29.4h	T/C 6.5h	14.7h	20.3h	T/C 10.0h	24.5h	11.8h	14.7h
NH-AA2600	5.6h	12.3h	T/C 12.0h	14.1h	18.8h	7.1h	14.1h	T/C 12.0h	28.2h	T/C 6.5h	14.1h	19.5h	T/C 10.0h	23.5h	11.3h	13.8h
NH-AA2500	5.5h	11.0h	T/C 12.0h	13.8h	18.4h	6.9h	13.8h	T/C 12.0h	27.6h	T/C 6.5h	13.8h	18.8h	T/C 10.0h	23.0h	11.0h	13.5h
NH-AA2300	5.5h	11.0h	T/C 12.0h	13.8h	18.4h	6.9h	13.8h	T/C 12.0h	27.6h	T/C 6.5h	13.8h	17.3h	T/C 10.0h	23.0h	11.0h	13.5h
NH-AA2200	5.3h	10.6h	T/C 12.0h	13.2h	17.6h	6.6h	13.2h	T/C 12.0h	26.4h	T/C 6.5h	13.2h	16.5h	T/C 10.0h	22.0h	10.6h	13.2h
NH-AA2000	5.0h	9.6h	12.0h	12.0h	16.0h	6.0h	12.0h	T/C 12.0h	24.0h	T/C 6.5h	12.0h	15.0h	9.6h	20.0h	9.6h	12h
NH-AA1800	4.3h	8.6h	10.8h	10.8h	14.4h	5.4h	10.8h	10.8h	21.6h	6.0h	10.8h	13.5h	8.6h	18.0h	8.6h	10.8h
NH-AA1500	3.6h	7.2h	9.0h	9.0h	12.0h	4.5h	9.0h	9.0h	18.0h	5.0h	9.0h	11.0h	7.0h	15.0h	7.0h	9h
NH-AAA1100	2.9h	5.8h	5.7h	5.7h	7.6h	2.9h	5.7h	5.7h	11.4h	T/C 6.5h	9.5h	16.5h	9.5h	16.3h	4.6h	5.7h
NH-AAA1000	2.6h	5.2h	5.1h	5.1h	6.8h	2.6h	5.1h	T/C 12.0h	10.2h	T/C 6.5h	8.5h	15.0h	8.5h	14.6h	4.1h	5.1h
NH-AAA900	2.4h	4.8h	4.8h	4.8h	6.4h	2.4h	4.8h	10.8h	9.6h	6.4h	8.0h	13.5h	8.0h	13.7h	3.8h	4.8h
NH-AAA800	2.4h	4.8h	4.8h	4.8h	6.4h	2.4h	4.8h	9.6h	9.6h	6.4h	8.0h	12.0h	8.0h	13.7h	3.8h	4.8h
NH-AAA600	1.8h	3.6h	3.6h	3.6h	4.8h	1.8h	3.6h	7.2h	7.2h	4.8h	6.0h	9.0h	6.0h	10.3h	3.0h	NA
NH-9V250	NA	NA	12.0h	18.8h	NA	NA	NA	NA	NA	NA	NA	12.0h	12.0h	NA	12.0h	NA
NH-9V200	NA	NA	9.6h	15.0h	NA	NA	NA	NA	NA	NA	NA	10.0h	9.6h	NA	10.0h	NA
Ni-Cd Batteries																
NC-D1600	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	8.0h	NA
NC-C1600	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	7.7h	NA
NC-AA1000	2.4h	4.8h	6.0h	6.0h	8.0h	3.0h	6.0h	6.0h	12.0h	3.3h	6.0h	7.5h	4.8h	10.0h	4.8h	6h
NC-AA900	2.2h	4.4h	5.4h	5.4h	7.2h	2.7h	5.4h	5.4h	10.8h	3.0h	5.4h	6.8h	4.3h	9.0h	4.3h	5.4h
NC-AA800	2.0h	4.0h	4.8h	4.8h	6.4h	2.4h	4.8h	4.8h	9.6h	2.7h	4.8h	6.0h	3.8h	8.0h	3.8h	4.8h
NC-AA600	1.4h	2.9h	3.6h	3.6h	4.8h	1.8h	3.6h	3.6h	7.2h	2.0h	3.6h	4.5h	3.0h	6.0h	2.9h	3.6h
NC-AAA300	54min	1.8h	1.8h	1.8h	2.4h	54min	1.8h	3.6h	3.6h	2.4h	3.0h	4.5h	3.0h	5.1h	1.5h	1.8h
NC-9V120	NA	NA	5.8h	9.0h	NA	NA	NA	NA	NA	NA	NA	5.8h	5.8h	NA	5.8h	NA

