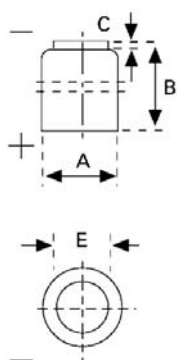


Data Sheet
Lithium Manganese Dioxide
CR 1/3 N


Type Number..... 6131
Designation IEC..... CR 11108
System..... Li-Manganese dioxide/
 Organic Electrolyte

UL Recognition..... MH 13654 (N)

Nominal Voltage..... 3 V

Typical Capacity C..... 170 mAh

Load 5.6 kOhm, at 20°C down to 2 V

Weight (approx.)..... 3 g

Volume..... 1,1 ccm

Coding..... TBA

Temperature Ranges	min	max.
Storage.....	-55°C	70°C
Discharge.....	-20°C	65°C

Dimensions	min	max.
Diameter (A)	11,4	11,6
Height (B).....	10,4	10,8
Shoulder Diameter [E]	7,8	
Shoulder Height [C]	0,4	

Segment..... Electronic

Main Applications..... Photo
 Electronic

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	2.0V
Continuous	5600 Ω	Time: [h]:	335
24h/d, 7d/w		Capacity [mAh]:	170
Current [μA]		Energy [MWh]:	475

All Data contained herein is for single cells
 For battery applications, performance data may vary from single cell data, depending on specific battery configuration