


# SANYO

## Cadnica

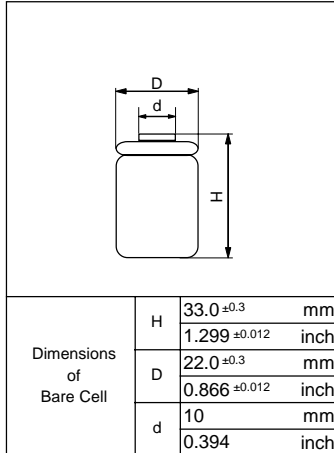


## Cell Type CP-1700SCR Specifications


|   |           |  |                                 |
|---|-----------|--|---------------------------------|
| Nominal Capacity                            |           | 1700mAh  |                                 |
| Nominal Voltage                             |           | 1.2V   |                                 |
| Charging Current                            | Standard  | 170mA  |                                 |
|   | Fast      | 2550mA   |                                 |
| Charging Time                               | Standard  | 14 to 16Hrs.   |                                 |
|   | Fast      | about 1Hr.   |                                 |
| Ambient Temperature                         | Charge    | Standard   | 0°C to +45°C [ +32°F to 113°F ] |
|   |           | Fast   | 5°C to +40°C [ +41°F to 104°F ] |
|   | Discharge | -20°C to +60°C [ -4°F to 140°F ]   |                                 |
| Storage                                     |           | -30°C to +50°C [ -22°F to 122°F ]  |                                 |
| Internal Impedance (Av.) (at 50% discharge) |           | 5.5mΩ (at 1000Hz)  |                                 |
| Weight                                      |           | 45g/1.59oz   |                                 |
| Dimensions(D)x(H) (with tube)               |           | 22.9 <sup>0</sup> <sub>-1</sub> × 34.0 <sup>0</sup> <sub>-1.2</sub> mm<br>0.90 <sup>0</sup> <sub>-0.04</sub> × 1.34 <sup>0</sup> <sub>-0.05</sub> inch |                                 |

### Typical Characteristics


#### Charge

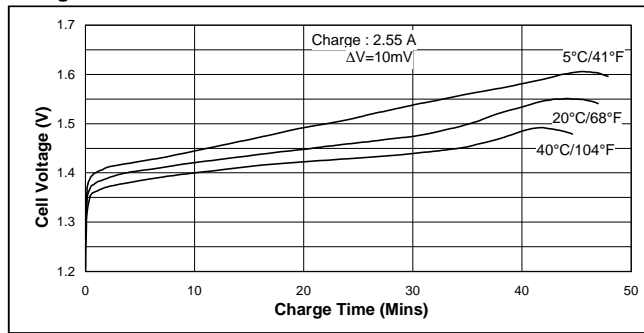


#### Discharge (at high rate)

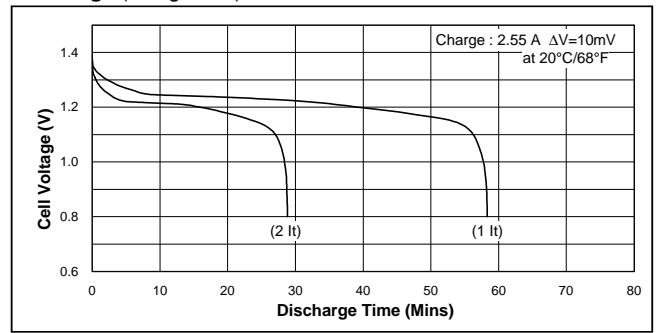


#### Cell capacity (at various discharge rate)

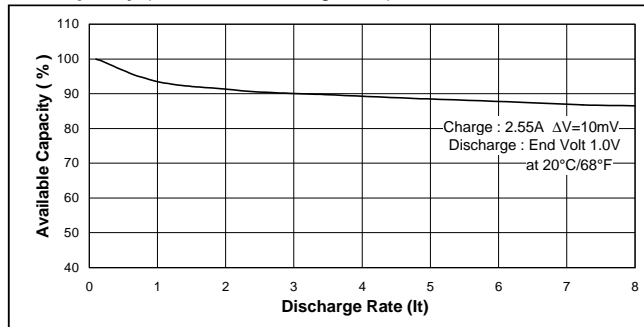

#### Discharge (at high rate)

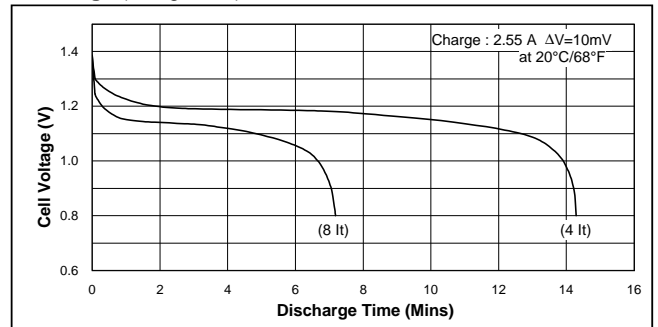

#### Discharge (at low rate)

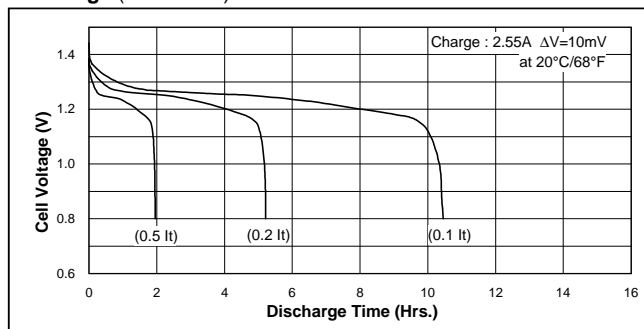

#### Temperature (Charge & Discharge)

