


# SANYO

## Cadnica

# Cell Type KR-AAH


## Specifications

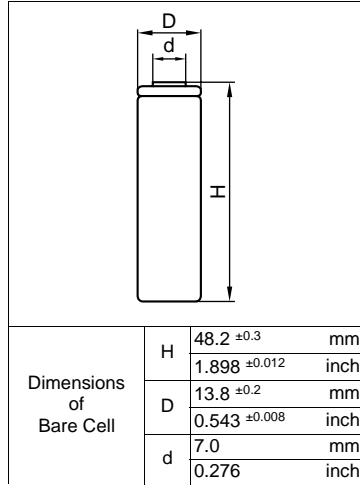


Nominal Capacity		600mAh
Nominal Voltage		1.2V
Charging Current	Trickle	20mA
	Standard	60mA
Charging Time	Trickle	above 48Hrs.
	Standard	14 to 16Hrs.
Ambient Temperature	Charge	0°C to +70°C [+32°F to 158°F]
	Discharge	-20°C to +70°C [-4°F to 158°F]
	Storage	-30°C to +70°C [-22°F to 158°F]
Internal Impedance (Av.) (at 50% discharge)		15.0mΩ (at 1000Hz)
Weight		23g/0.81oz
Dimensions(D)×(H) (with tube)		14.3 <sup>0</sup> <sub>-0.5</sub> × 48.9 <sup>0</sup> <sub>-1</sub> mm
		0.56 <sup>0</sup> <sub>-0.02</sub> × 1.93 <sup>0</sup> <sub>-0.04</sub> inch

### Typical Characteristics


#### Charge

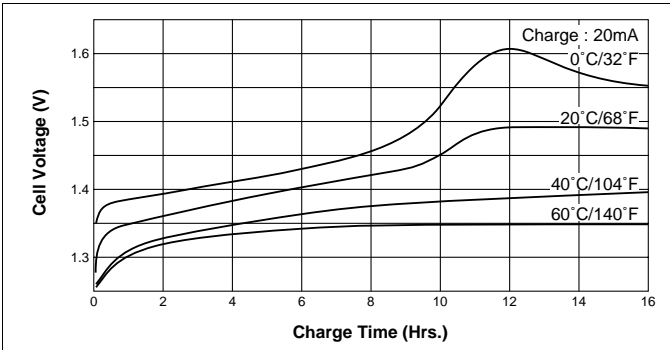


#### Discharge (at high rate)

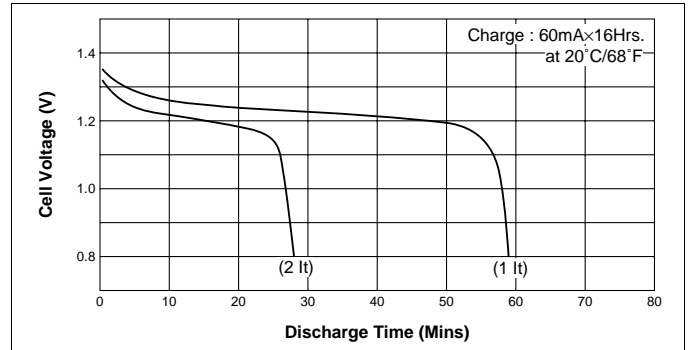


#### Charge

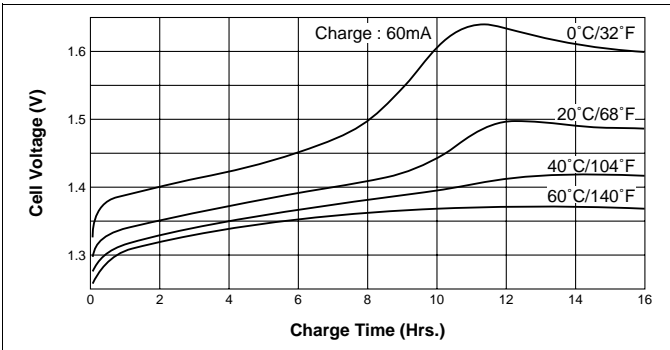

#### Discharge Trickle charge (at high temperature)

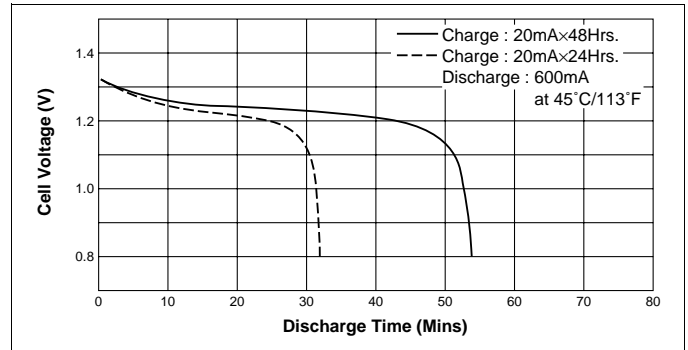

#### Discharge (at low rate)

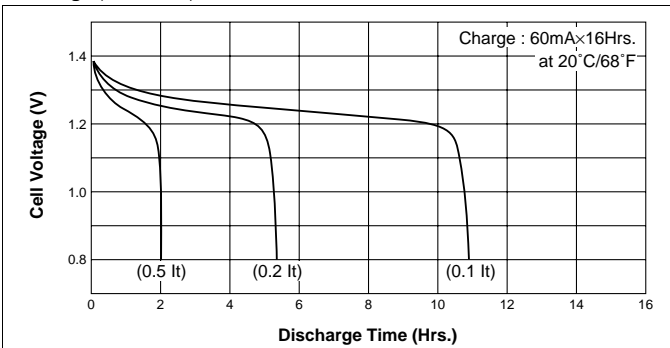

#### Temperature (Charge & Discharge)

