


SANYO Cadnica


Cell Type KR-5/3MH Specifications

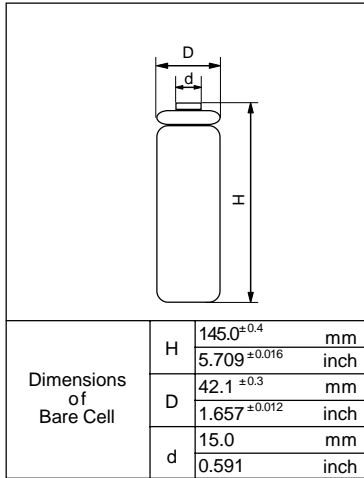


Nominal Capacity		20000mAh
Nominal Voltage		1.2V
Charging Current	Trickle	667mA
	Standard	2000mA
Charging Time	Trickle	above 48Hrs.
	Standard	14 to 16Hrs.
Ambient Temperature	Charge	0°C to +70°C [+32°F to 158°F]
	Discharge	-20°C to +70°C [-4°F to 158°F]
	Storage	-30°C to +70°C [-22°F to 158°F]
Internal Impedance (Av.) (at 50% discharge)		2.6mΩ (at 1000Hz)
Weight		648g/ 22.86oz
Dimensions(D)x(H) (with tube)		43.1 ⁰ ₋₁ × 146.1 ⁰ _{-1.5} mm
		1.70 ⁰ _{-0.04} × 5.75 ⁰ _{-0.06} inch

Typical Characteristics


Charge

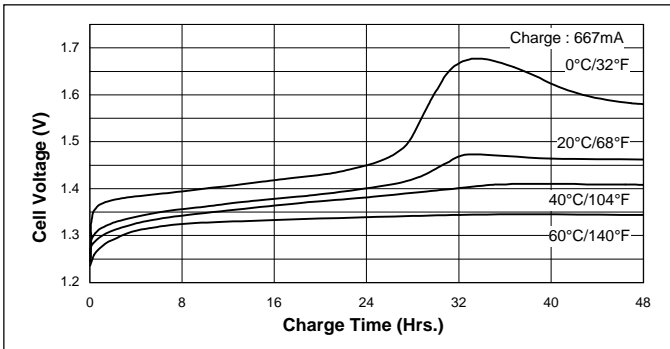


Discharge(at high rate)

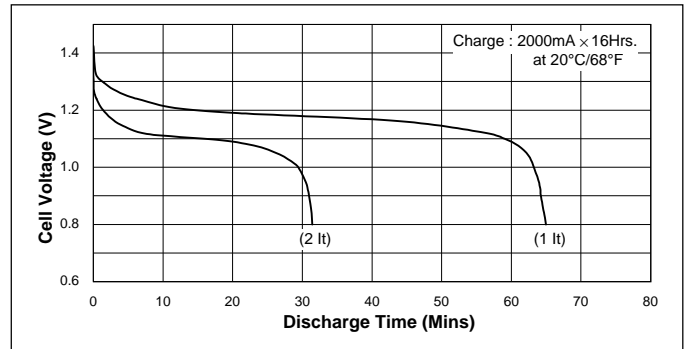


Charge

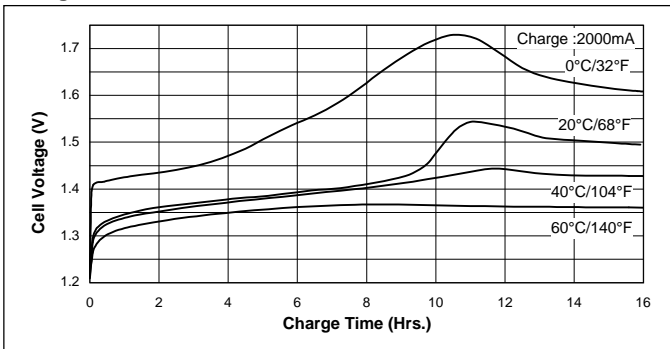

Discharge(at high rate)

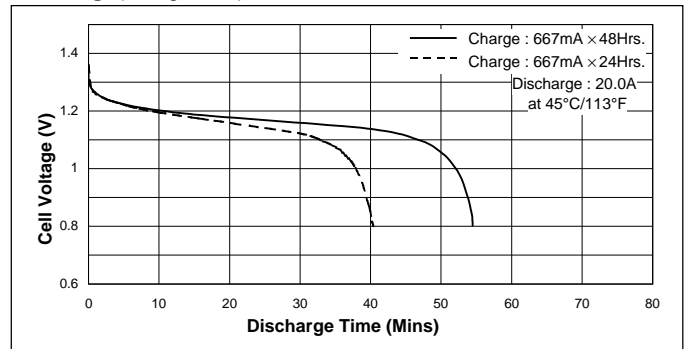

Discharge(at low rate)

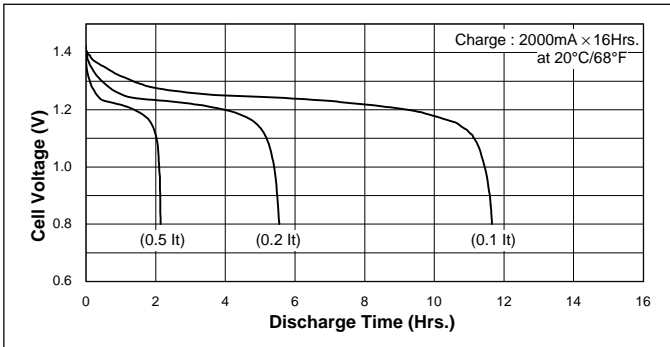

Temperature(Charge & Discharge)

