


Specifications

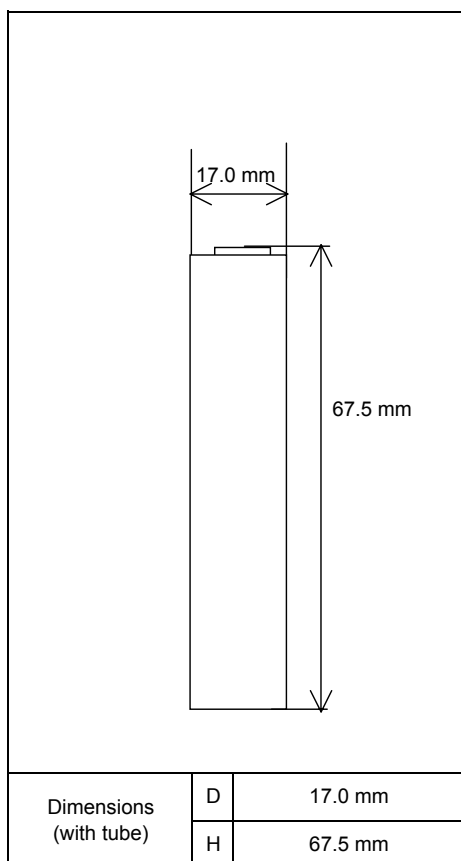

Type : Nickel-Metal Hydride Battery			Size : 4/3A
Capacity ₁₎	Typical		4000mAh
	Minimum		3600mAh
Nominal Voltage			1.2V
Charging Current x Time		Fast Charge ₂₎	3000mA x about 1.4h
Ambient Temp.	Charge Condition	Fast Charge ₂₎	0°C - 40°C
	Discharge Condition		0°C - 50°C
	Storage Condition	Less than 30days	-20°C - 50°C
		Less than 90days	-20°C - 40°C
		Less than 1year	-20°C - 30°C
Internal Impedance ₃₎ (after discharge to E.V.=1.0V)			Approx. 20mΩ(at
Weight ₄₎			Approx. 55 g
Size ₄₎ :(Diameter) x (Height)			17.0(D) x 67.5(H) mm

1) Single cell capacity under the following condition.

Charge : 400mA×16h, Discharge : 800mA(E.V.=1.0V) at 20°C


2) Use recommended charging system.

3) After a few charge and discharge cycles under the above 1) condition.

4) With tube.

Typical Characteristics

Charge

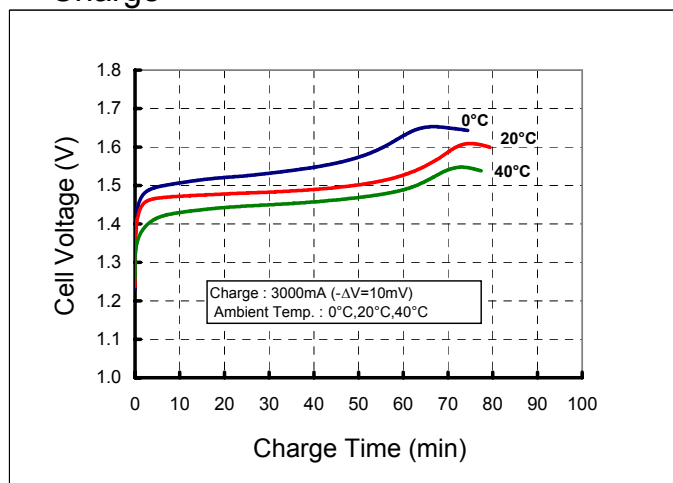

Discharge

