


FR6(15-LF)

Lithium Battery



Dimensions

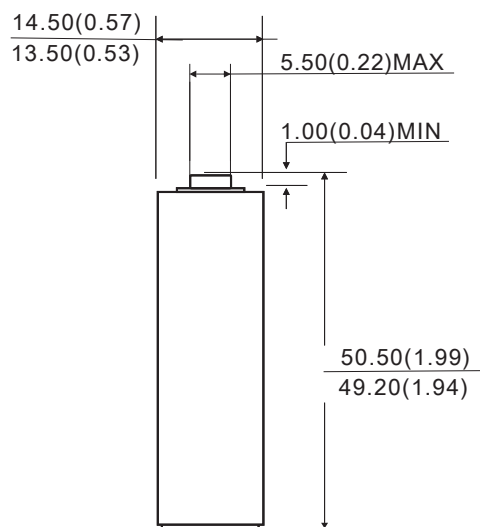

Unit:mm(inch)

Specifications

Chemical System:	Lithium Iron Disulfide(Li/FeS ₂)
IEC Name:	FR6
ANSI/NEDA:	15-LF(AA)
Camelion Model:	FR6
Average Weight:	15g
Dimension(Ø x H):	14.0 ^{±0.5} x 49.85 ^{±0.65} mm 0.56 ^{±0.02} x 1.96 ^{±0.03} inch
Terminals:	Flat
Nominal Voltage:	1.5Volts
Capacity:	2700mAh (Rated at 25mA to 0.8V)
Operating Temperature:	-40°C-60°C
Storage Temperature:	-40°C-60°C
Relative Humidity:	60±15%
Jacket :	Aluminum Foil Label

Usage Guide



Electronic games



Toy



Digital Still Camera

Cautions

Storage

Store the battery in a cool, dry and well-ventilated area.

Handling

- 1) Do not charge. Do not heat or dispose of in fire or water. Do not modify or disassemble. Do not short-circuit.
- 2) Keep away from metal or other conductive materials.
- 3) Keep away from children. In case of ingestion, consult a doctor immediately.
- 4) When the battery is stored or disposed of, isolate positive (+) and negative (-) terminals of the battery to avoid those terminals touching each other.
- 5) In case the electrolyte(s) from the battery come in contact with your mouth, gargle well and consult a doctor immediately.

Notice:


Environmental elements comply with 2006/66/EC requirements. This information is subject to change without prior notice and for reference only. It should not be used as a basis for a product guarantee or warranty. For additional information, please consult your nearest Camelion Sales Office or Distributor or visit our website at: www.camelionbattery.com.

FR6(15-LF)

Lithium Battery

Temperature Effects on Capacity

Constant current discharge

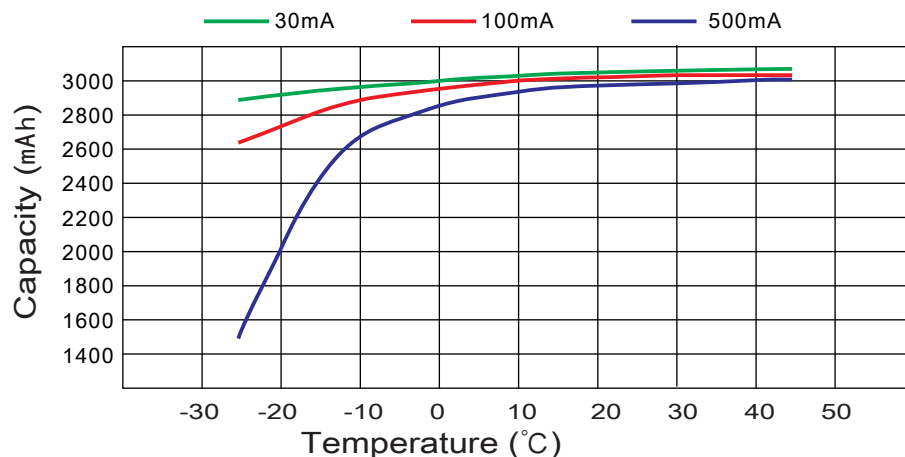

ANSI/IEC Standard Testing

Typical Characteristics 21°C

