
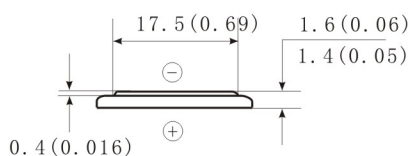


**LITHIUM BUTTON CELL**

Document Title: Pb102016

**CR2016**



Unit:mm (inch)

Chemical System : Lithium/Manganese Dioxide

IEC Name: CR 2016

ANSI/NEDA: 5000LC

Camelion Model : CR2016

Average Weight : 1.7g

Dimension ( Øx H ) : 20.0<sup>-0.3</sup>x1.6<sup>-0.2</sup>mm  
0.79<sup>-0.01</sup>x0.06<sup>-0.01</sup>inch

Terminals: Flat

Nominal Voltage : 3.0Volts

Capacity :75.0mAh

(20±2°C , Rated at 30kΩ to 2.00V)

Standard Discharge Current: 0.1mA

Max. Continuous Discharge Current: 0.3mA

Max. Pulse Discharge Current: 10.0mA

Operating Temperature: -20°C-60°C

Storage Conditions


Temperature: 18-28°C

Relative Humidity: 60±15%


Cross Reference: E-CR2016(Energizer),  
DL2016(Duracell),KECR2016(Rayovac)

**Discharge characteristics**

(20±2°C, Rated at 30kΩ to 2.00V)

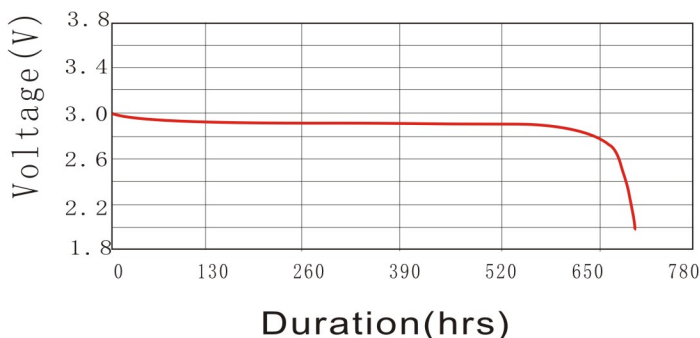

**Temperature Characteristics**

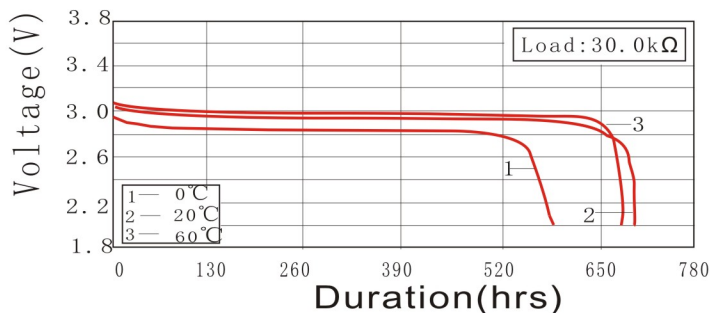

**Notice:**

Environmental elements comply with RoHS requirements. This information is subject to change without prior notice and for reference only. It should not be used as a basis for a product guarantee or warranty. For additional information, please