


### PHOTO LITHIUM BATTERY

# **CR123A**

#### Dimensions:

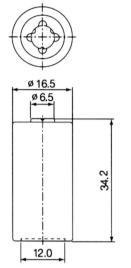

Unit: mm(inch)

Chemical System : Lithium/Manganese Dioxide

Camelion Number : CR123A Average Weight : 17.0g

Dimension (Φ x H) :  $16.5^{\pm0.2}$  x34. $2^{\pm0.2}$ mm :  $0.65^{\pm0.01}$  x1. $35^{\pm0.01}$ inch

Nominal Voltage : 3.0 Volts

Terminals : Flat, Recessed Negative

Nominal Capacity : 1300mAh (20±2°C 14mA constantly discharge to 2.0V)

Standard discharge current : 14.0mA


Max. Continiuous Discharge current : 1000mA

Max. Pulse Discharge currnt : 3000mA


Relative Humidity : 65±20%

Jacket : Aluminum Foil Label

## **Typical Temperature Characteristics**

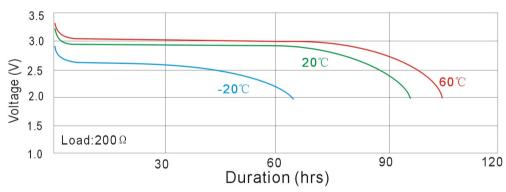

### Typical Load Characteristics

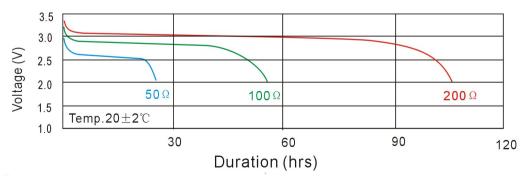

#### **Import Notice**

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest Camelion Sales and Marketing or Distributors or visit the web address; www.camelionbattery.com..