


Product Datasheet

Alkaline

Powerline



6LR61AD

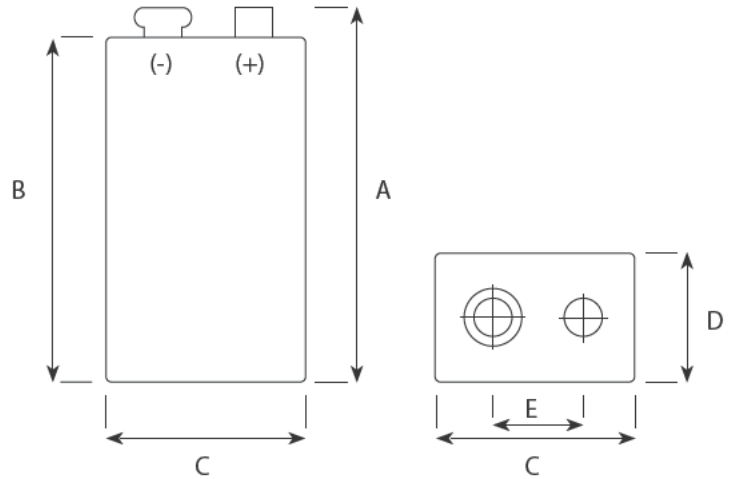

| IEC Dimensions (mm) | | |
|---------------------|---------|---------|
| Dimension | Maximum | Minimum |
| A | 48,5 | 46,5 |
| B | 46,4 | — |
| C | 26,5 | 24,5 |
| D | 17,5 | 15,5 |
| E | 12,95 | 12,45 |

Specifications

| | |
|------------------------------------|---|
| Name | 9V / 6LR61 / 6AM6 / MN1604 / 1604A / 1604AC |
| Made in | Belgium |
| Type | Alkaline Foil |
| Nominal Voltage | 9 Volt |
| Electrolyte | Potassium Hydroxide |
| Average weight | 43 g |
| Storage temp. range | +10°C (50°F) ~ +25°C (77°F) |
| Operating temp. range | -20°C (-4°F) ~ +55°C (131°F) |
| Average Impedance | +/- 2,3 Ohm @ 1kHz fresh |
| Heavy metals | No added mercury (Hg), Cadmium (Cd) or Lead (Pb) |
| Compliant to | IEC 60086-1, IEC 60086-2, IEC 60086-5 non dangerous goods regulation EU directive 2006/66/EC Nordic Ecolabel |
| Recommended cut off voltage | 5,4V per battery |




For more information:

www.panasonic-batteries.com

Panasonic

Typical discharge values

6LR61AD

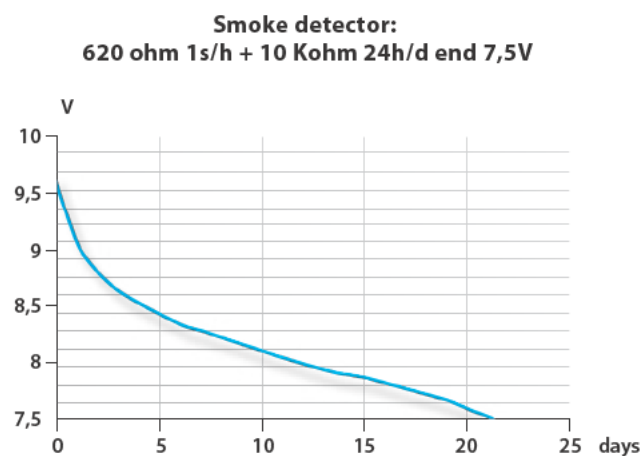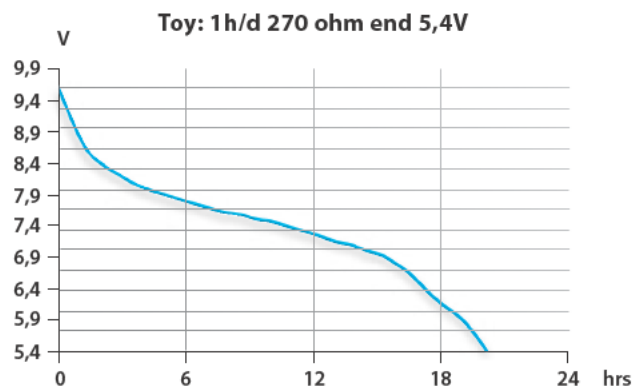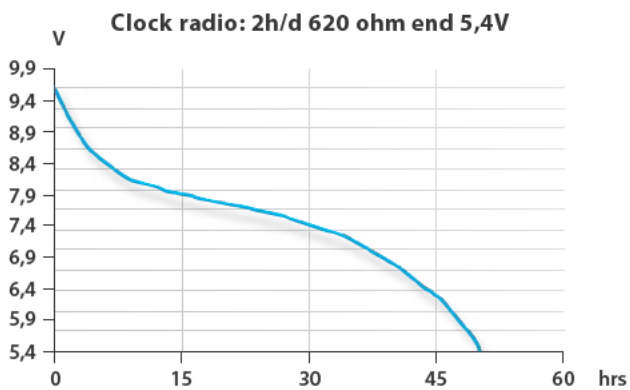

Discharge Temperature Characteristics

6LR61AD

