
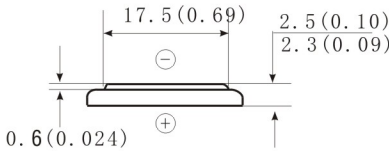


## LITHIUM BUTTON CELL

Document Title: Pb102025

# CR2025

Chemical System : Lithium/Manganese Dioxide  
 IEC Name: CR 2025  
 ANSI/NEDA: 5003LC  
 Camelion Model : CR2025  
 Average Weight : 2.5g  
 Dimension( Øx H ) :  $20.0^{+0.3} \times 2.5^{+0.2}$  mm  
 $0.79^{+0.01} \times 0.10^{+0.01}$  inch




Unit:mm (inch)


Terminals: Flat  
 Nominal Voltage : 3.0Volts  
 Capacity :150mAh  
 (20±2°C, Rated at 15kΩ to 2.00V)  
 Standard Discharge Current: 0.2mA  
 Max. Continuous Discharge Current: 0.5mA  
 Max. Pulse Discharge Current: 15.0mA  
 Operating Temperature: -20°C-60°C  
 Storage Conditions  
 Temperature: 18-28°C  
 Relative Humidity: 60±15%  
 Cross Reference: E-CR2025(Energizer),  
 DL2025(Duracell), KECR2025(Rayovac)

### Discharge characteristics

(20±2°C, Rated at 15kΩ to 2.00V)

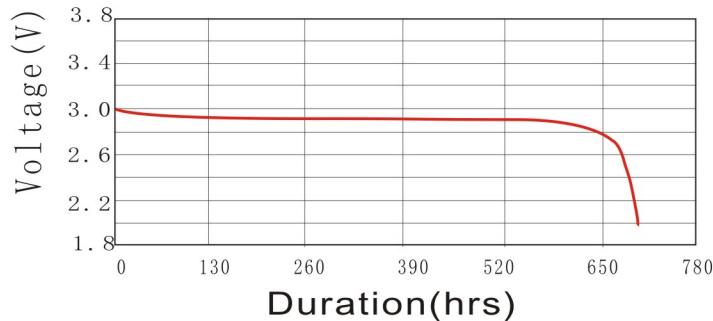

### Temperature Characteristics

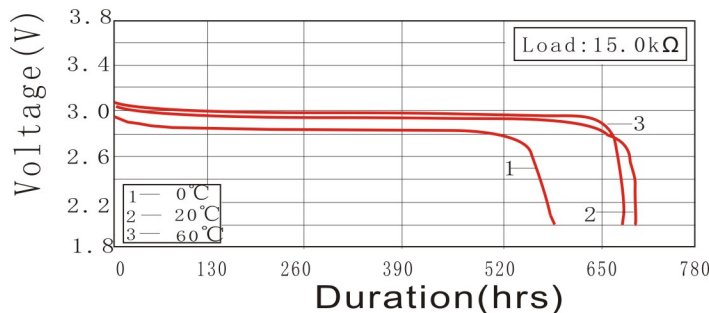

**Notice:**

Environmental elements comply with RoHS requirements. This information is subject to change without prior notice and for reference only. It should not be used as a basis for a product guarantee or warranty. For additional information, please