

HLC-1550A

- › Delivering high current pulses
- › Up to 25 years lifetime and more
- › Wide operating temperature range
- › Low self discharge

Performance Data


(Typical values in *PulsesPlus™* batteries stored at +25 °C)

System	Lithium Intercalated Compounds
Nominal voltage	3.67 V, optional 3.9 V
Nominal capacity	560 As (155 mAh) @ 3.67 V 850 As (240 mAh) @ 3.9 V
Nominal current	50 mA
Max. continuous discharge current	2000 mA
Pulse current capability	5000 mA
Max. charge voltage	3.95 V
Max. charge current	100 mA
Discharge end voltage	2.5 V
Cell impedance	max. 100 mΩ (@ 1 kHz, RT)
Lithium content	0.05 g @ 3.67 V 0.10 g @ 3.9 V
Weight	20 g


For more data please refer to page 37.




HLC-1550/S

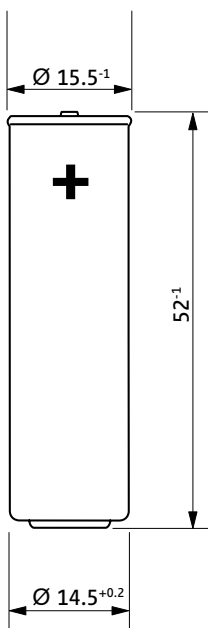

HLC-1550/T

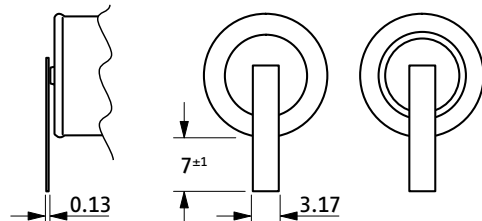

HLC-1550/TP

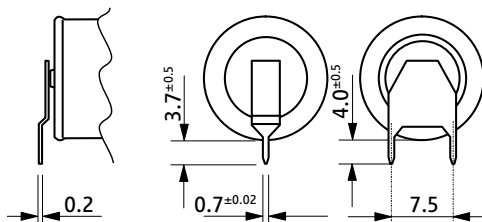


Available Terminations

Termination	Standard	Catalogue No.
HLC-1550A/S	Standard	13 0 11551 02
HLC-1550A/T	Tags	13 0 11552 02
HLC-1550A/TP	Polarized tags	13 0 11557 02


CAUTION:
Fire, explosion,
and severe burn hazard.
Do not disassemble, heat
above 100 °C, or incinerate.

Use as part of *PulsesPlus™*
battery only. Do not
charge above 3.95 V.


Voltage during a Pulse at +25 °C

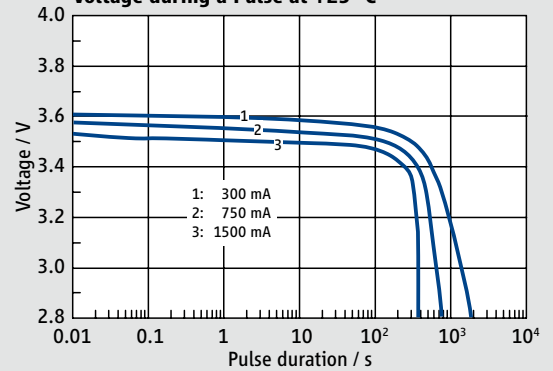

Maximum Pulse Width from 3.6 V to 2.8 V

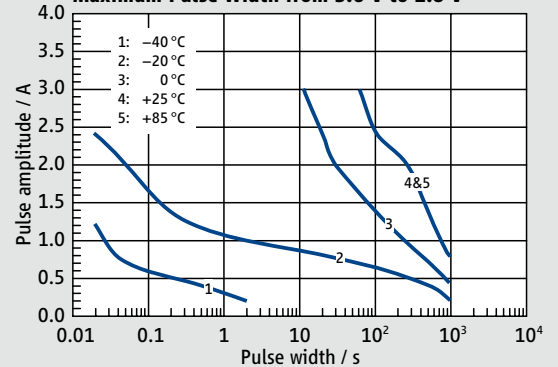

Pulse Voltage after 1 s

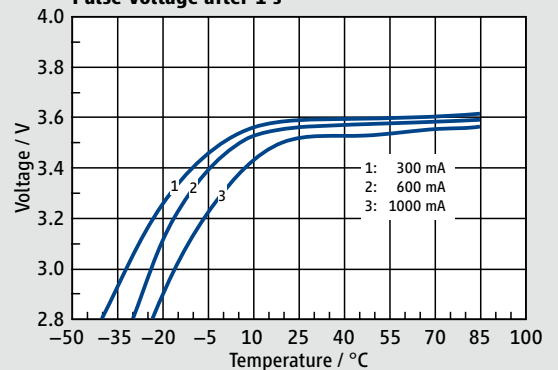

Voltage Curve at +25 °C

