


### Specifications

<b>Classification:</b>	Zinc
<b>Chemical System:</b>	Zinc Air (Zn/O <sub>2</sub> )
<b>Designation:</b>	ANSI-7005 ZD, IEC-PR70
<b>Nominal Voltage:</b>	1.4V
<b>Operating Temp:</b>	0°C to 50°C (32°F to 122°F)
<b>Typical Weight:</b>	0.3 g
<b>Typical Volume:</b>	0.06 cm <sup>3</sup>
<b>Rated Capacity:</b>	95 mAh @ 3000 ohm to 1.1V
<b>Typical Impedance:</b>	16 ohm @ 1kHz

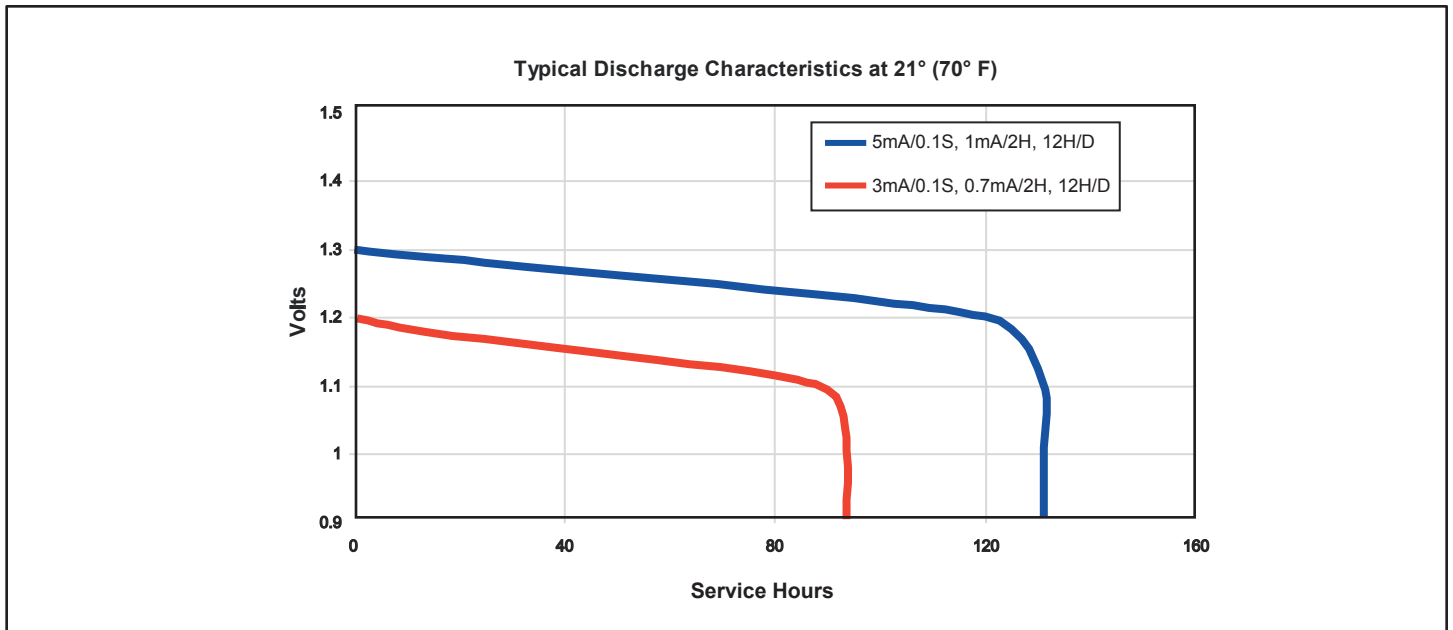

**DURACELL®**  
BATTERIES

Berkshire Corporate Park  
Bethel, CT 06801 U.S.A.  
Telephone: Toll free 1.800.544.5454  
Internet: [www.duracell.com](http://www.duracell.com)

\*Delivered capacity is dependent on the applied load, intermittent usage, operating temperature and cut off voltage. Please refer to the charts and discharge data for examples of energy/service life that the battery will provide for various conditions.

Information and contents in this data sheet are for reference purposes only. They do not constitute any warranty and representation is subject to change without notice. For most current information and further details, please contact Duracell.