


BK-210A
HHR-210A (OLD)

STANDARD TYPE
A SIZE (HR17/50)

N type


DIMENSIONS (MM)

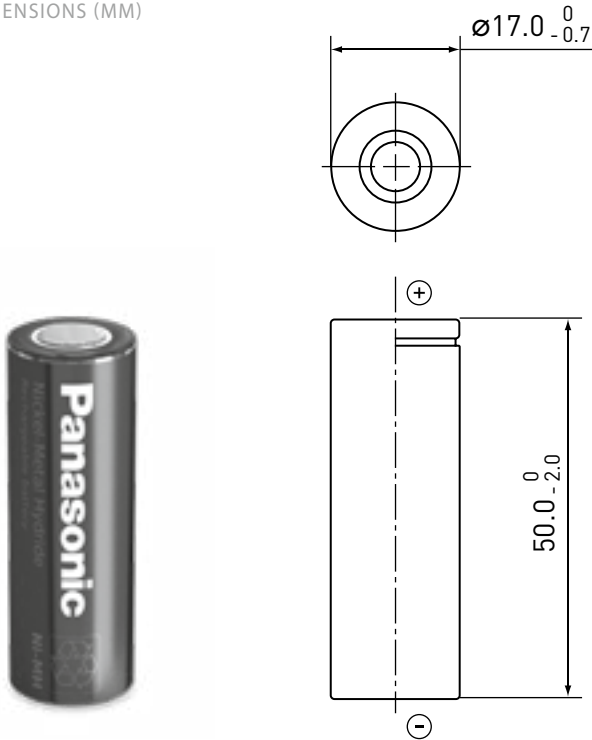



SPECIFICATIONS

Name		BK-210A
Diameter (mm)		17.0 +0/-0.7
Height (mm)		50.0 +0/-2.0
Approximate weight (g)		38
Nominal voltage (V)		1.2
Discharge capacity*1	Average*2 (mAh)	2,200
	Rated/min. (mAh)	2,100
Approx. internal impedance at 1,000Hz at charged state (mΩ)		20
Charge	Standard (mA x hrs.)	210 x 16
	Rapid*3 (mA x hrs.)	2,100 x 1.2
Charge	Standard (°C)	0 to +45
	Rapid (°C)	0 to +40
Discharge (°C)		-10 to +65
Storage	<1 year	-20 to +35
	<6 months	-20 to +45
	<1 month	-20 to +55
	<1 week	-20 to +65

TYPICAL CHARGE CHARACTERISTICS

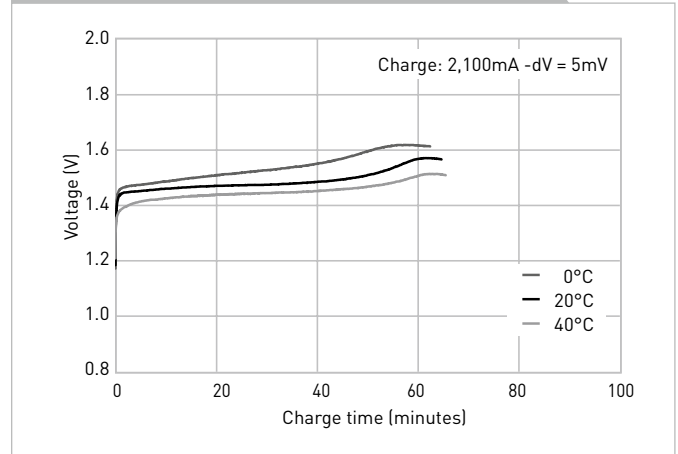

TYPICAL DISCHARGE CHARACTERISTICS

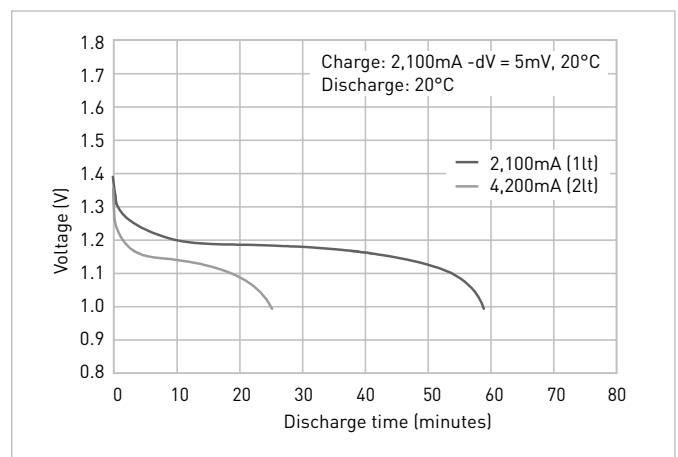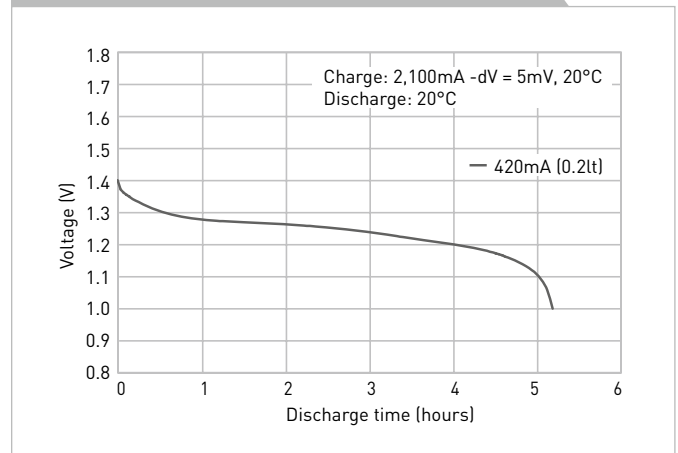

*1 After charging at 0.1It for 16 hours, discharging at 0.2It.
*2 For reference only.
*3 Need specially designed control system. Please contact Panasonic for details.