


BK-200SCP

HHR-200SCP (OLD)

HIGH RATE DISCHARGE & RAPID CHARGE TYPE
4/5SC SIZE (HR23/34)**P** TYPE

DIMENSIONS (MM)

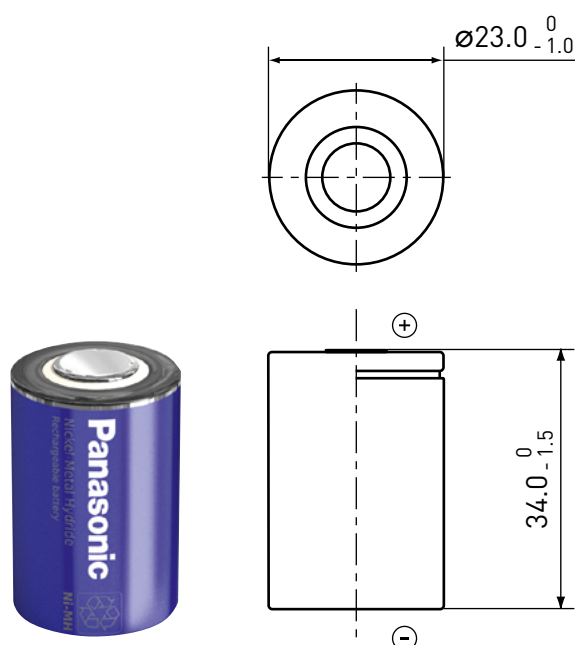

Specifications		BK-200SCP
Diameter (mm)		23.0 +0/-1.0
Total height (mm)		34.0 +0/-1.5
Approximate weight (g)		42
Nominal voltage (V)		1.2
Discharge capacity*1	Typical capacity*2 (mAh)	2,100
	Nominal capacity*3 (mAh)	1,900
Approx. internal impedance at 1,000Hz at charged state (mΩ)		5
Charge	Standard (mA x hrs.)	190 x 16
	Rapid*4 (mA x hrs.)	2,000 x 1.2
Ambient temperature	Charge (°C)	0 to 45
	Discharge (°C)	-10 to 65
	Storage (°C)	<1 year -20 to 35
		<6 months -20 to 45
Storage (°C)		<1 month -20 to 55
		<1 week -20 to 65


*1 After charging at 0.1It for 16 hours, discharging at 0.2It.

*2 Average capacity (mAh). For reference only.

*3 Rated capacity (mAh).

*4 Need specially designed control system. Please contact Panasonic for details.

TYPICAL CHARGE CHARACTERISTICS

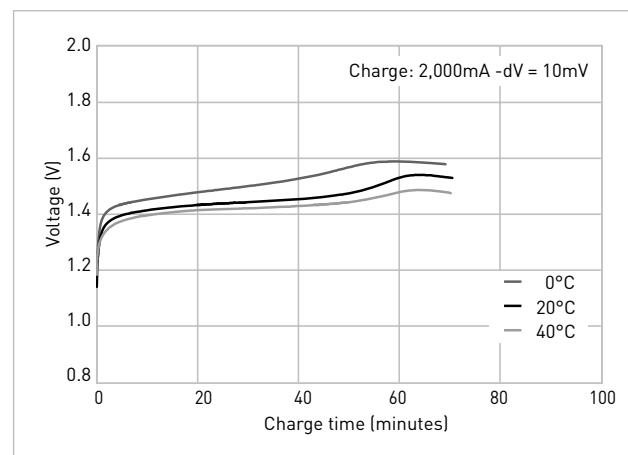

TYPICAL DISCHARGE CHARACTERISTICS

