


BK-300SCP
HHR-300SCP (OLD)

HIGH RATE DISCHARGE & RAPID CHARGE TYPE
SC SIZE (HR23/43)

P type


DIMENSIONS (MM)

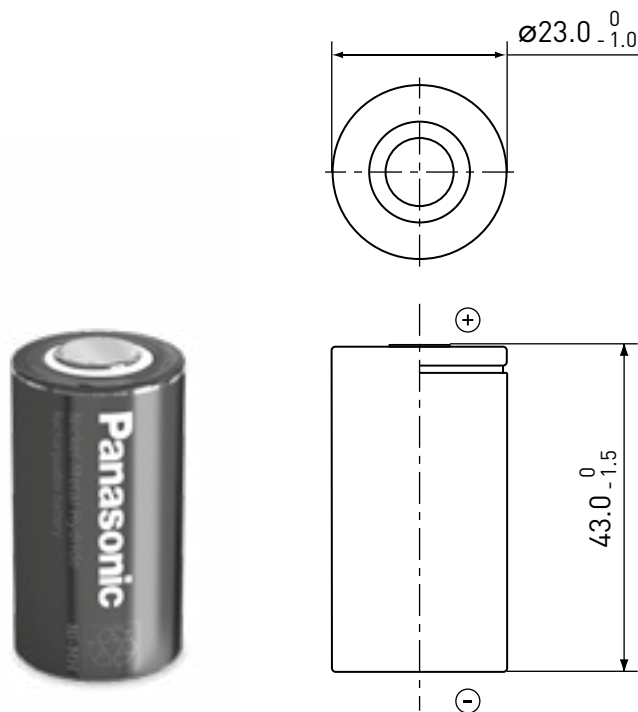



SPECIFICATIONS

Name		BK-300SCP
Diameter (mm)		23.0 +0 / -1.0
Height (mm)		43.0 +0 / -1.5
Approximate weight (g)		57
Nominal voltage (V)		1.2
Discharge capacity*1	Average*2 (mAh)	3,050
	Rated/min. (mAh)	2,800
Approx. internal impedance at 1,000Hz at charged state (mΩ)		4
Charge	Standard (mA x hrs.)	280 x 16
	Rapid*3 (mA x hrs.)	3,000 x 1.2
Charge	Standard (°C)	0 to +45
	Rapid (°C)	0 to +40
Discharge (°C)		-10 to +65
Storage	<1 year	-20 to +35
	<6 months	-20 to +45
	<1 month	-20 to +55
	<1 week	-20 to +65

TYPICAL CHARGE CHARACTERISTICS

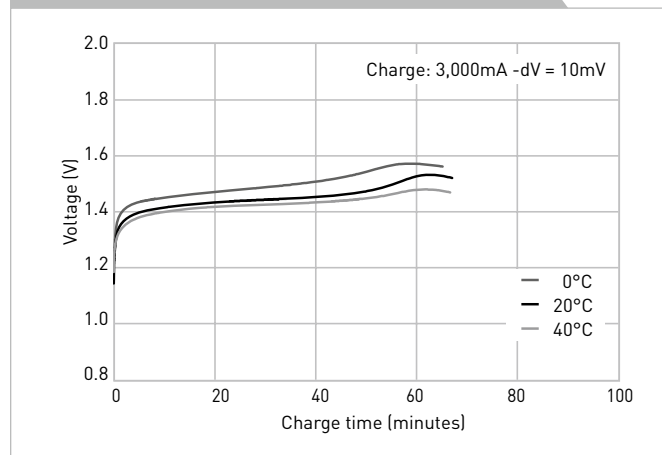

TYPICAL DISCHARGE CHARACTERISTICS

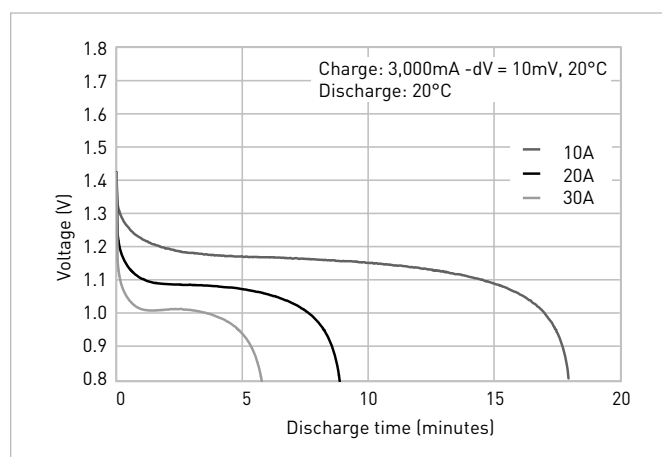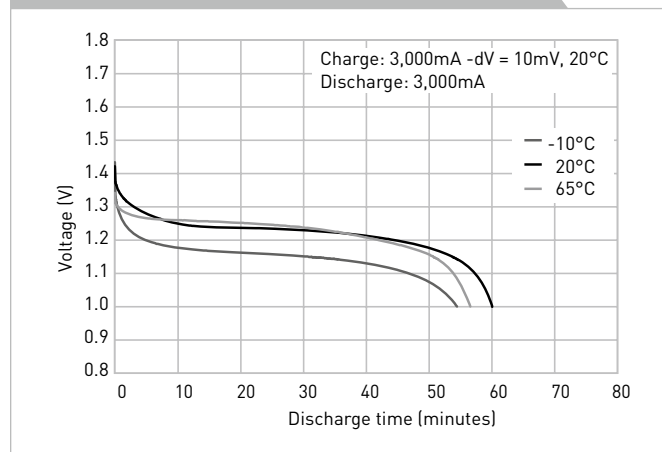

*1 After charging at 0.1It for 16 hours, discharging at 0.2It.
*2 For reference only.
*3 Need specially designed control system. Please contact Panasonic for details.