


INDIVIDUAL DATA SHEETS

BK-70AAH
HHR-70AAH (OLD)



HIGH TEMPERATURE & LONG LIFE TYPE
AA SIZE (HR15/49)



DIMENSIONS (MM)

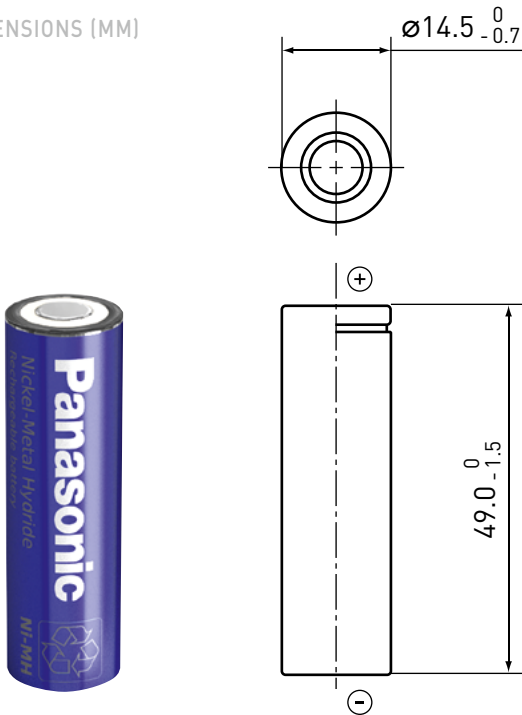


TYPICAL CHARGE CHARACTERISTICS

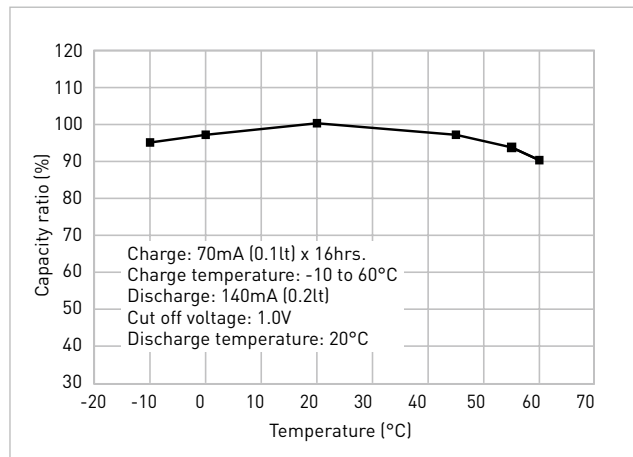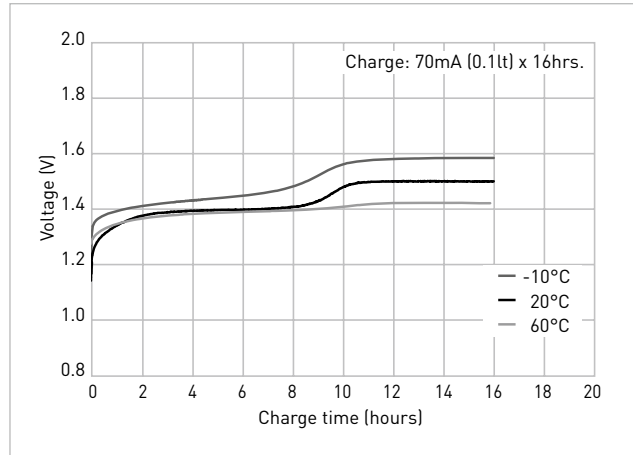

Specifications		BK-70AAH
Diameter (mm)		14.5 +0/-0.7
Total height (mm)		49.0 +0/-1.5
Approximate weight (g)		18
Nominal voltage (V)		1.2
Discharge capacity*1	Typical capacity*2 (mAh)	750
	Nominal capacity*3 (mAh)	700
Approx. internal impedance at 1,000Hz at charged state (mΩ)		25
Charge	Standard (mA x hrs.)	70 x 16
	Rapid*4 (mA x hrs.)	350 x 2.4
	Low rate (mA x hrs.)	35 x 32
Ambient temperature	Standard	-10 to 60
	Rapid	-10 to 45
	Low rate	-10 to 60
Storage (°C)	<1 year	-20 to 35
	<6 months	-20 to 45
	<1 month	-20 to 55
	<1 week	-20 to 65

TYPICAL DISCHARGE CHARACTERISTICS

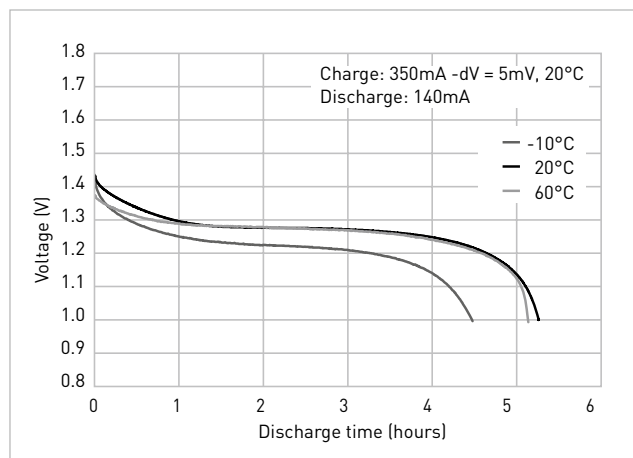

*1 After charging at 0.1It for 16 hours, discharging at 0.2It.
*2 Average capacity (mAh). For reference only.
*3 Rated capacity (mAh).
*4 Need specially designed control system. Please contact Panasonic for details.