


## BK-210AH HHR-210AH (OLD)

DIMENSIONS (MM)

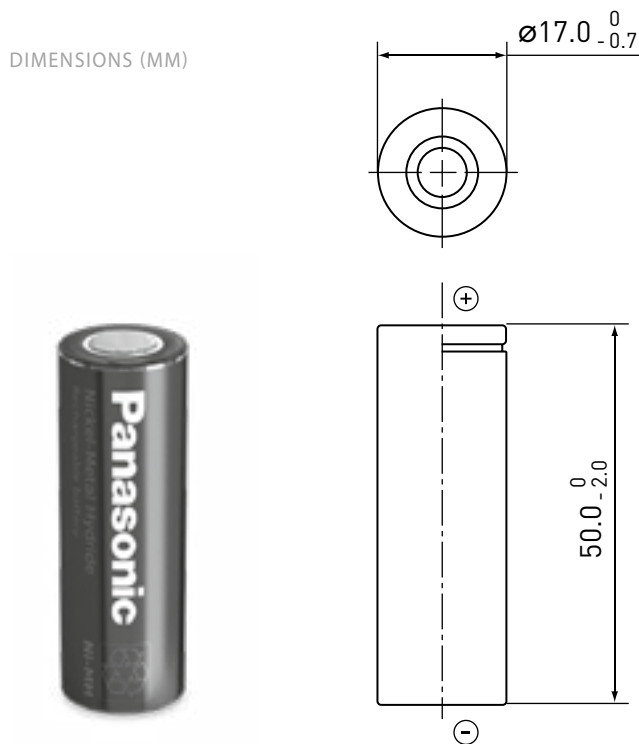


### SPECIFICATIONS



Name		BK-210AH	
Diameter (mm)		17.0 +0/-0.7	
Height (mm)		50.0 +0/-2.0	
Approximate weight (g)		36	
Nominal voltage (V)		1.2	
Discharge capacity*1	Average*2 (mAh)	2,050	
	Rated/min. (mAh)	1,900	
Approx. internal impedance at 1,000Hz at charged state (mΩ)		20	
Charge	Standard (mA x hrs.)	190 x 16	
	Rapid*3 (mA x hrs.)	1,000 x 2.3	
	Low rate (mA x hrs.)	105 x 32	
		70 x 48	
Charge (°C)	Standard	-10 to +60	
	Rapid	-10 to +45	
	Low rate	-10 to +60	
Discharge (°C)		-10 to +60	
Ambient temperature	Storage (°C)	<1 year	-20 to +35
		<6 months	-20 to +45
	Storage (°C)	<1 month	-20 to +55
		<1 week	-20 to +65

\*1 After charging at 0.1It for 16 hours, discharging at 0.2It.  
 \*2 For reference only.  
 \*3 Need specially designed control system. Please contact Panasonic for details.

HIGH TEMPERATURE & LONG LIFE TYPE  
A SIZE (HR17/50)



### TYPICAL CHARGE CHARACTERISTICS

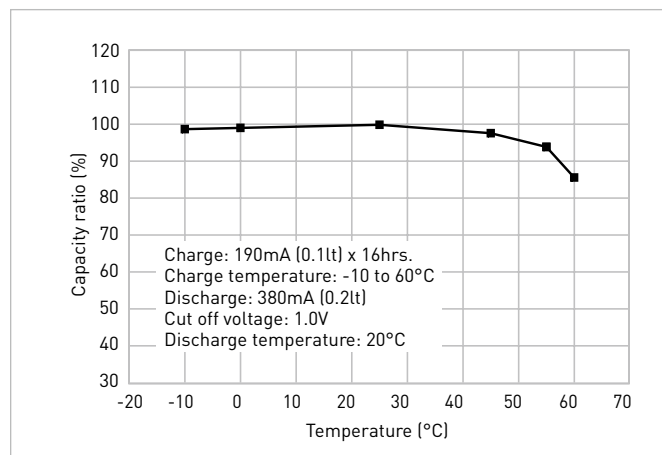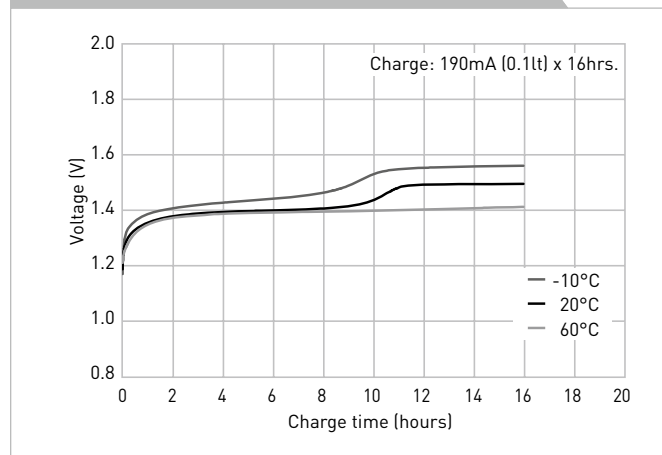

### TYPICAL DISCHARGE CHARACTERISTICS

