


BK-370AH
HHR-370AH (OLD)

DIMENSIONS (MM)

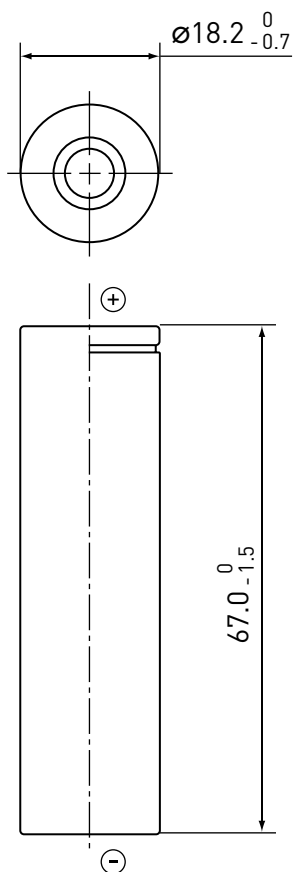

HIGH TEMPERATURE & LONG LIFE TYPE
LFAT/A SIZE



H type

SPECIFICATIONS

Name		BK-370AH	
Diameter (mm)		18.2 +0/-0.7	
Height (mm)		67.0 +0/-1.5	
Approximate weight (g)		60	
Nominal voltage (V)		1.2	
Discharge capacity*1	Average*2 (mAh)	3,700	
	Rated/min. (mAh)	3,500	
Approx. internal impedance at 1,000Hz at charged state (mΩ)		20	
Charge	Standard (mA x hrs.)	350 x 16	
	Rapid*3 (mA x hrs.)	3,000 x 1.4	
	Low rate (mA x hrs.)	185 x 32	
		123 x 48	
Charge (°C)	Standard	-10 to +60	
	Rapid		
	Low rate	-10 to +45	
Discharge (°C)		-10 to +60	
Ambient temperature	Storage (°C)	<1 year	-20 to +35
		<6 months	-20 to +45
	Storage (°C)	<1 month	-20 to +55
		<1 week	-20 to +65

*1 After charging at 0.1It for 16 hours, discharging at 0.2It.
*2 For reference only.
*3 Need specially designed control system. Please contact Panasonic for details.

TYPICAL CHARGE CHARACTERISTICS

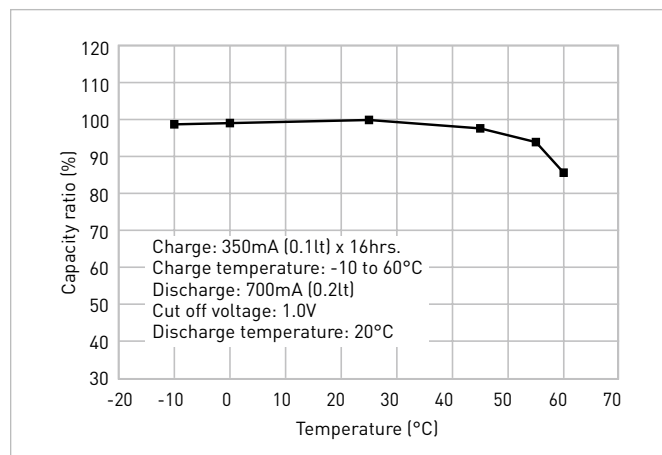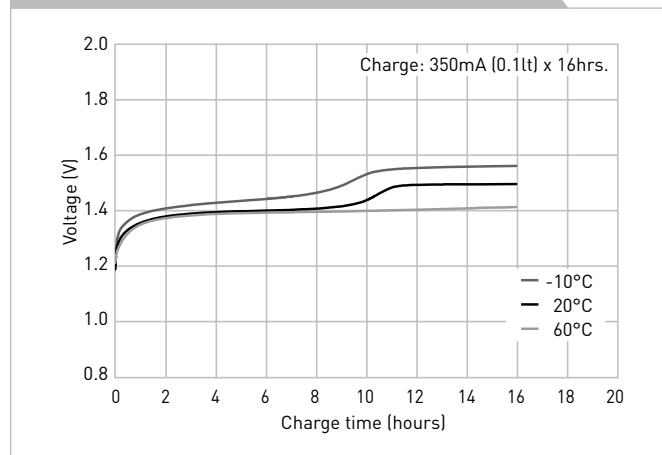

TYPICAL DISCHARGE CHARACTERISTICS

