


# Sprinter – S12V370 data sheet



## Terminal: Drawing:

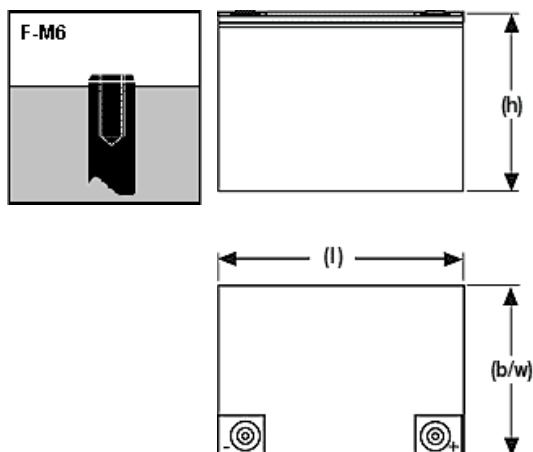

## Specifications:

Part numbers not valid for North America, use type for ordering!

Discharge figures are also valid for **UL 94 V0** version. Change "H" to "V" in the part number.

*Example*

Standard	NASR120370	<b>H</b>	P0FA
UL 94 V0	NASR120370	<b>V</b>	P0FA

Exide type designation	Nom. Voltage V	Power 15min 1.67 VpC 20°C W/cell	Power 15min 1.67 VpC 25°C W/cell	Length (l) max. mm	Width (b/w) max. mm	Height (h1) max. mm	Height over terminals (h2) max. mm	Weight approx. kg	Internal resistance mOhm	Short circuit current A	Terminal
S12V370	12	355	373	306	174	224	235	33.4	2.9	4266	F-M6

## Constant-power discharge in W/cell @ 20 °C

Part number	Vpc	5 min	10 min	15 min	20 min	30 min	45 min	1 h	1,25 h	1,5 h
NASR120370HP0FA	1.85	489	356	287	242	186	139	112	93.2	79.9
NASR120370HP0FA	1.80	577	414	328	273	207	151	120	99.9	84.7
NASR120370HP0FA	1.75	635	436	341	282	213	155	122	101	86.6
NASR120370HP0FA	1.70	669	457	354	292	217	157	123	101	86.6
NASR120370HP0FA	1.67	688	460	355	294	218	158	124	102	87.5
NASR120370HP0FA	1.65	696	462	357	294	218	158	124	102	87.5
NASR120370HP0FA	1.60	703	464	357	295	219	159	125	103	88.5
NASR120370HP0FA	1.50	716	466	359	296	220	159	125	103	88.5