



Cell Type GT-4000D Specifications

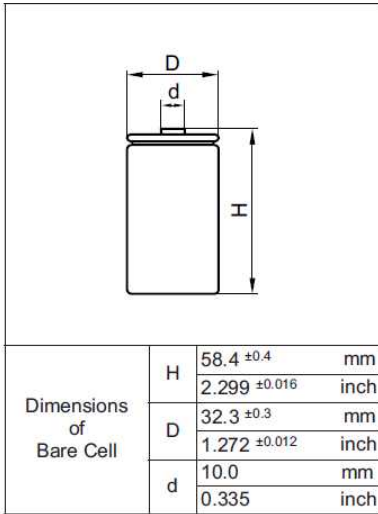


Rated Capacity (at 20°C)		Min.4000mAh
Typical Capacity		Typ.4300mAh
Nominal Voltage		1.2V
Charging Method	(≥ 0deg.C)	Tricle 80~200mA Std. 400mA×16Hrs.
	(< 0deg.C)	Constant Current - Maximum Voltage 200mA Max. - 1.55V Max.
Ambient Temperature	Charge	-40~+60°C
	Discharge	-40~+60°C
	Storage	-40~+50°C
Weight (w ith tube, Typ.)		144g (TBD)
Dimensions (w ith tube, Max.)	(D)	33.2mm
	(H)	59.5mm


Discharge Rate Characteristics

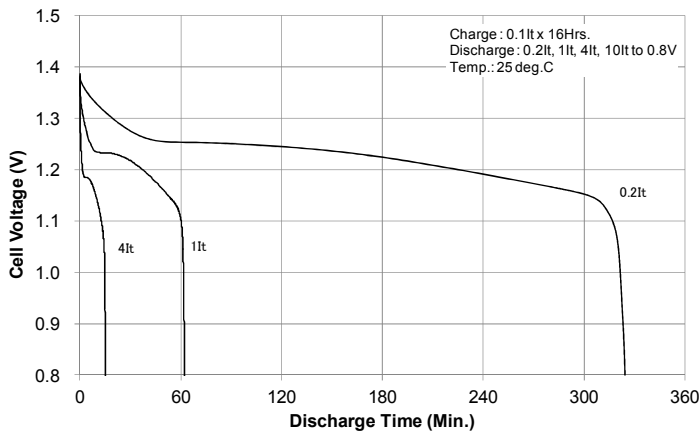


Charge Temperature Characteristics

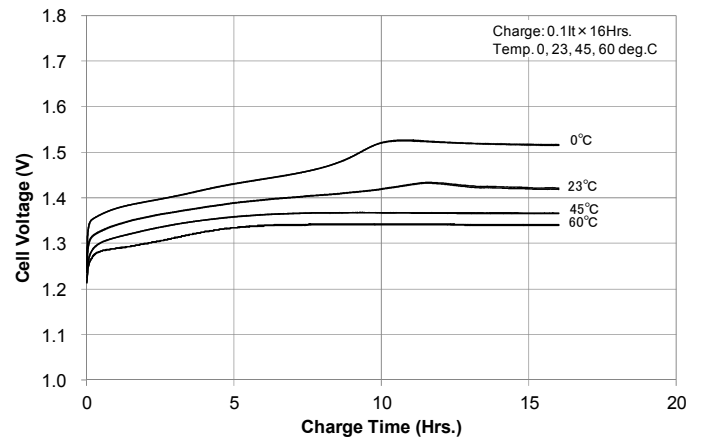

Low Temp. Charge Characteristics

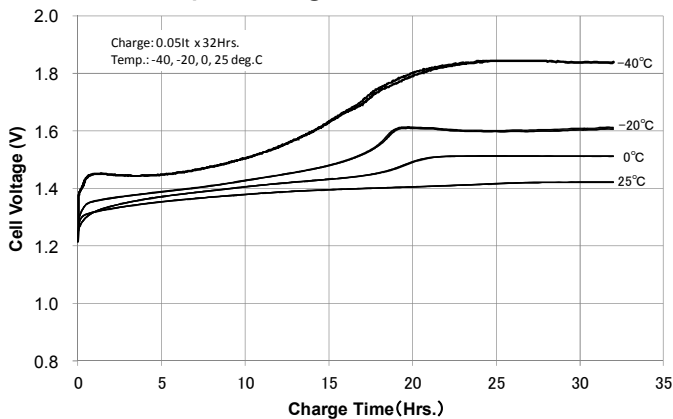

Low Temp. Discharge Characteristics

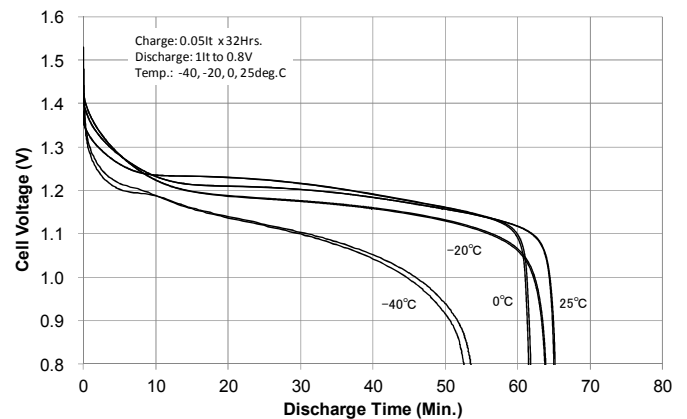

It is highly recommended that maximum charging voltage is limited (1.55V- 1.60V : please ask us to set appropriate voltage)