


DJW12-5.4 (12 5.4)



	12	
(20)	5.4	
		90±1
		70±1
		101±1
	(.)	107±1
	1.68	
	T2	
	ABS	
	5.40 A /0.27A	(20 ,1.80 / ,25°C)
	5.02 A /0.502A	(10 ,1.80 / ,25°C)
	4.60 A /0.92A	(5 ,1.75 / ,25°C)
	4.14 A /1.38A	(3 ,1.75 / ,25°C)
	3.39 A /3.39A	(1 ,1.60 / ,25°C)
	81A (5)	
	30	
	: -40~60°C	
	: 0~40°C	
	: -40~40°C	
	25±3°C	
()	: 14,4 - 15,0	1,62 25°
	: -30	/°
()	: 13,5 - 13,8	25°
	: -20	/°
	40°C	103%
	25°C	100%
	0°C	86%
	8	260
	-	100%



(DC)

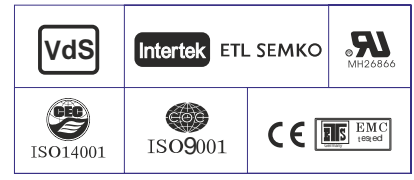










: A (25 °)

U _k /T	5	10	15	20	30	45	1	2	3	4	5	6	8	10	20
1.85 /	10.3	7.90	6.54	5.66	4.37	3.22	2.72	1.61	1.26	1.02	0.83	0.72	0.583	0.487	0.267
1.80 /	13.8	10.1	7.90	6.69	5.16	3.75	3.04	1.75	1.35	1.09	0.89	0.78	0.618	0.502	0.270
1.75 /	15.6	11.1	8.63	7.19	5.36	3.89	3.18	1.82	1.38	1.12	0.92	0.80	0.629	0.516	0.273
1.70 /	17.1	12.1	9.22	7.56	5.58	4.04	3.28	1.86	1.42	1.14	0.94	0.81	0.638	0.526	0.278
1.65 /	18.9	13.0	9.80	8.03	5.88	4.15	3.36	1.89	1.48	1.18	0.97	0.83	0.648	0.537	0.281
1.60 /	20.8	14.2	10.5	8.55	6.21	4.32	3.39	1.97	1.52	1.22	1.00	0.85	0.654	0.543	0.283

: / (25 °)

U _k /T	5	10	15	20	30	45	1	2	3	4	5	6	8	10	20
1.85 /	18.8	14.6	12.2	10.7	8.34	6.19	5.24	3.12	2.45	2.00	1.63	1.42	1.151	0.964	0.530
1.80 /	25.0	18.4	14.5	12.4	9.68	7.15	5.84	3.38	2.62	2.12	1.74	1.52	1.217	0.992	0.534
1.75 /	27.6	19.9	15.7	13.2	9.97	7.35	6.08	3.49	2.66	2.16	1.79	1.55	1.235	1.018	0.539
1.70 /	29.5	21.2	16.5	13.8	10.3	7.61	6.25	3.57	2.73	2.21	1.83	1.59	1.252	1.037	0.548
1.65 /	32.1	22.7	17.4	14.5	10.8	7.73	6.35	3.60	2.83	2.28	1.87	1.61	1.268	1.057	0.555
1.60 /	34.6	24.1	18.3	15.3	11.3	8.01	6.38	3.74	2.90	2.35	1.93	1.64	1.278	1.067	0.557



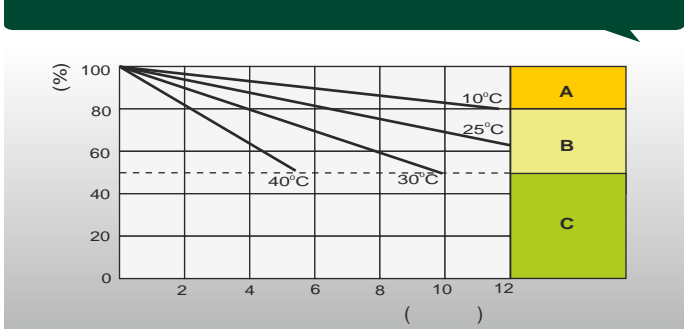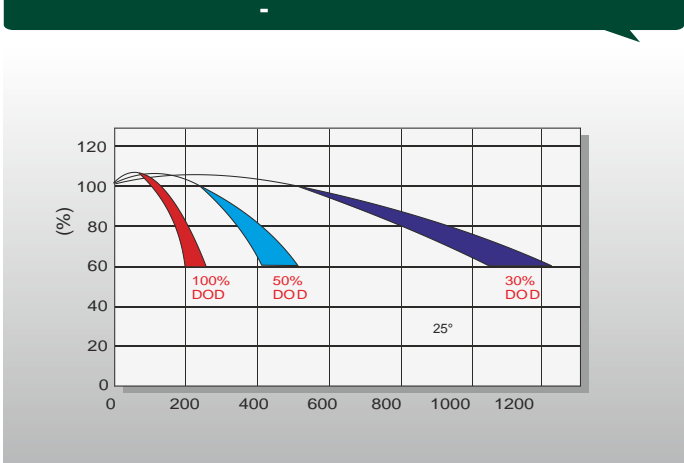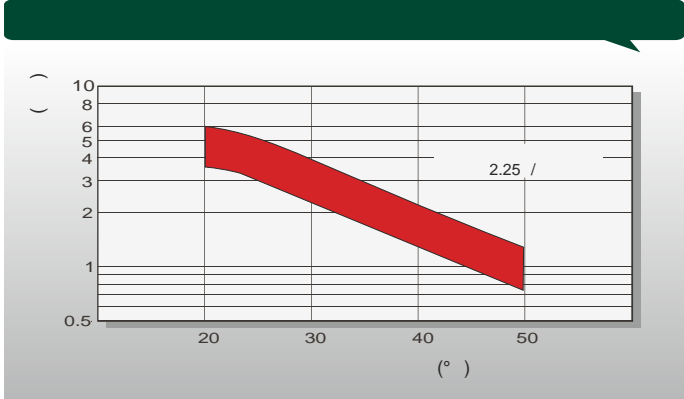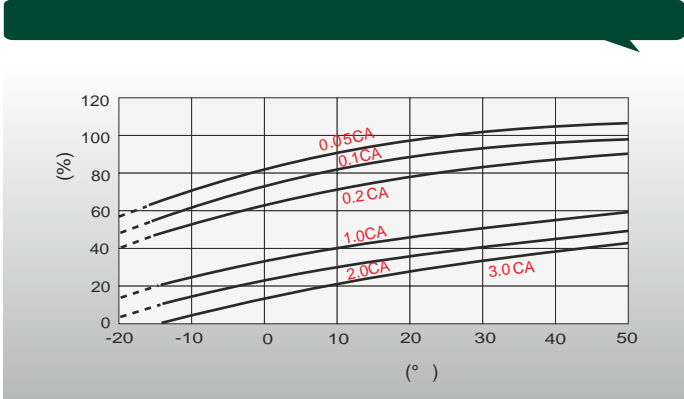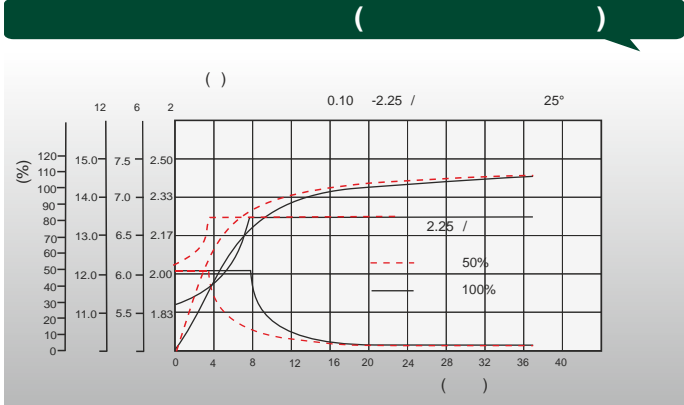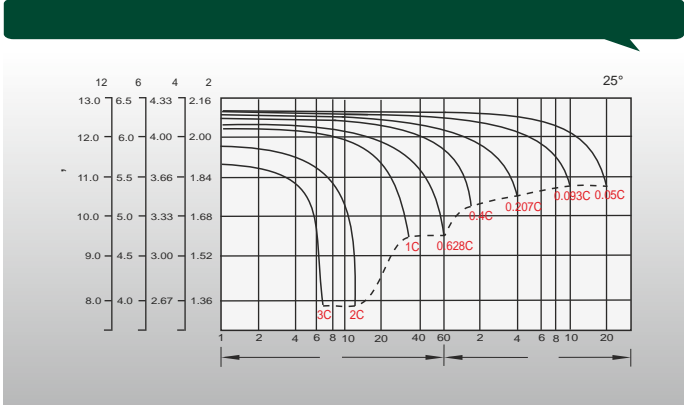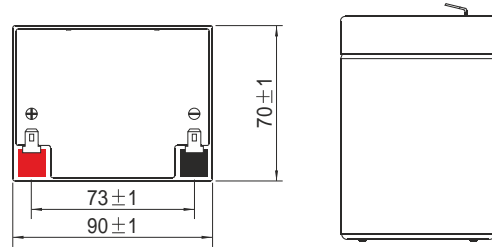

- A** () 100% ()
- B** 1. 0,25 , U-2.25 / . 3
2. 0,25 , U-2.45 / . 20
3. 0,05 8-10
- C** 100%