


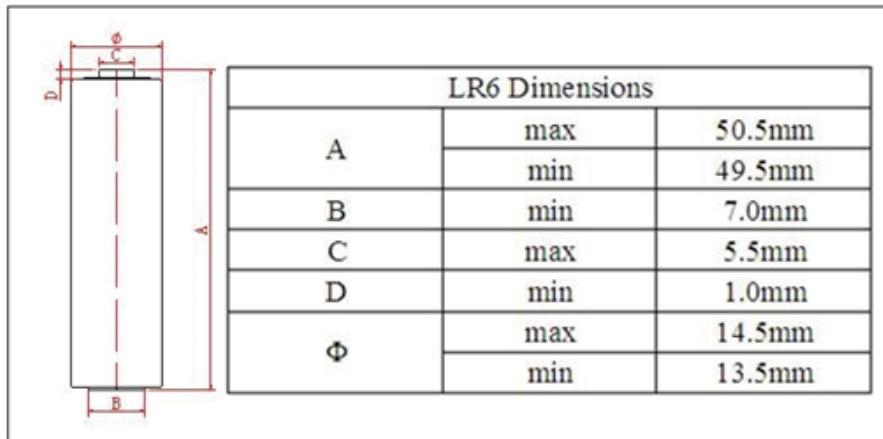

Chemical system:	Alkaline, MnO ₂ / KOH / Zn
Designations:	IEC LR6, ANSI 15A
Nominal Voltage:	1.5V
Nominal Capacity:	2200 mAh at 43 Ohms to 0.9 Volts
Average Weight:	22.8 g
Recommended storage temperature:	10 – 25 °C
Operating temperatures:	-20 – 50 °C
Reaction:	2 MnO ₂ + Zn + H ₂ O → 2 MnOOH + ZnO
Terminals:	Flat contacts, protruding negative
Jacket:	Aluminium label
Shelf life:	10 years from manufacturing date on packaging

Note:

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead / 99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2013/56/EU & 2006/122/EC.