


## KODAK Silver Oxide Battery

Effective: 16/06/2022

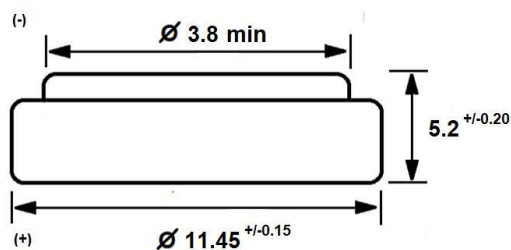

Dimensions are in millimetres

**Chemical system:**

Silver Oxide,  $\text{Ag}_2\text{O}$  /  $\text{KOH}$  /  $\text{Zn}$

**Designations:**

SG13, SR44

**Nominal Voltage:**

1.55 V

**Nominal Capacity:**

160 mAh at 6.8 kOhms to 0.9 Volts

**Weight:**

1.95 g

**Volume:**

0.56  $\text{cm}^3$

**Recommended storage temperature:**

10 – 25 °C

**Operating temperatures:**

-10 – 45 °C

**Reaction:**

$\text{Ag}_2\text{O} + \text{Zn} \rightarrow 2\text{Ag} + \text{ZnO}$

**Terminals:**

Flat contacts

**Jacket:**

None

Note:

- 1) Mercury <5ppm (0.0005%)
- 2) Lead <1000ppm (0.1%)
- 3) Cadmium <5ppm (0.0005%)
- 4) No added PFOS (Perfluoro octane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2013/56/EU & 2006/122/EC.
- 6) SDS sheets are available on request from Strand Europe Ltd.

**DANGER:** Keep batteries out of reach of children. If swallowed, the battery can cause serious injury or death. Severe burns can occur within hours of ingestion. If you suspect that a battery has been ingested, seek immediate medical attention. Have doctor call CHEMTREC Day or Night on 1-800-424-9300 / +1 703-527-3887, quoting CCN696626. **CAUTION:** Ensure that the battery compartment is completely secure, meaning closed and locked to prevent easy access by children. If the battery compartment cannot be completely secured, discontinue use of the product or keep out of sight and reach of children.