


INDIVIDUAL DATA SHEETS

BK-70AAAJ
HHR-70AAAJ (OLD)STANDARD TYPE
AAA SIZE (HR11/45)**N** TYPE

DIMENSIONS (MM)

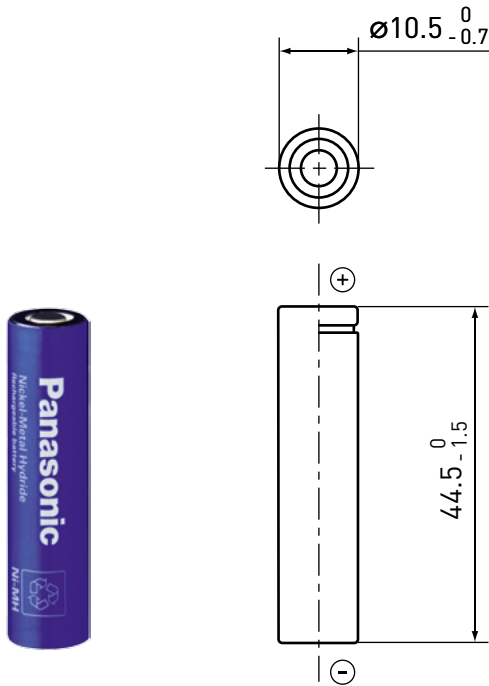

Specifications		BK-70AAAJ
Diameter (mm)		10.5 +0/-0.7
Total height (mm)		44.5 +0/-1.5
Approximate weight (g)		12
Nominal voltage (V)		1.2
Discharge capacity*1	Typical capacity*2 (mAh)	730
	Nominal capacity*3 (mAh)	700
Approx. internal impedance at 1,000Hz at charged state (mΩ)		35
Charge	Standard (mA x hrs.)	70 x 16
	Rapid*4 (mA x hrs.)	650 x 1.2
Charge (°C)	Standard	0 to 45
	Rapid	0 to 40
Discharge (°C)	Standard	-10 to 65
	Rapid	-10 to 40
Ambient temperature	<1 year	-20 to 35
	<6 months	-20 to 45
	<1 month	-20 to 55
	<1 week	-20 to 65


*1 After charging at 0.1It for 16 hours, discharging at 0.2It.

*2 Average capacity (mAh). For reference only.

*3 Rated capacity (mAh).

*4 Need specially designed control system. Please contact Panasonic for details.

TYPICAL CHARGE CHARACTERISTICS

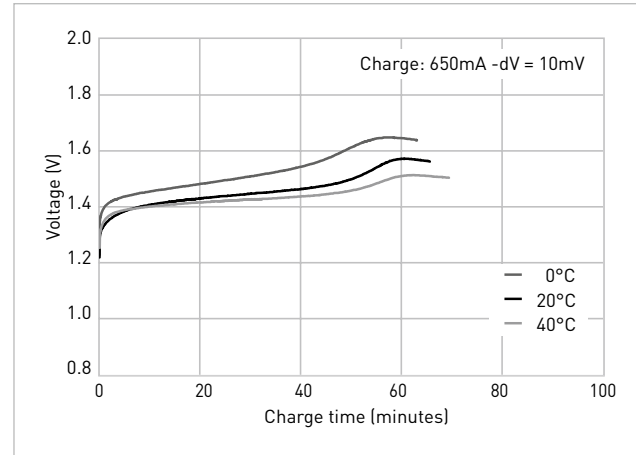

TYPICAL DISCHARGE CHARACTERISTICS

