


**BK-200A**

HHR-200A (OLD)

STANDARD TYPE  
4/5A SIZE (HR17/43)




DIMENSIONS (MM)

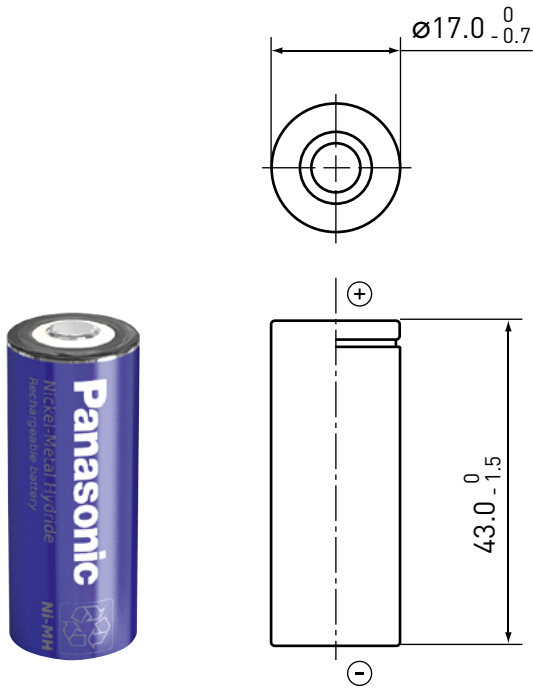

Specifications		BK-200A
Diameter (mm)		17.0 +0/-0.7
Total height (mm)		43.0 +0/-1.5
Approximate weight (g)		32
Nominal voltage (V)		1.2
Discharge capacity*1	Typical capacity*2 (mAh)	2,040
	Nominal capacity*3 (mAh)	2,000
Approx. internal impedance at 1,000Hz at charged state (mΩ)		20
Charge	Standard (mA x hrs.)	200 x 16
	Rapid*4 (mA x hrs.)	1,700 x 1.2
Charge (°C)	Standard	0 to 45
	Rapid	0 to 40
Discharge (°C)		-10 to 65
Ambient temperature	<1 year	-20 to 35
	<6 months	-20 to 45
	<1 month	-20 to 55
	<1 week	-20 to 65

\*1 After charging at 0.1It for 16 hours, discharging at 0.2It.  
 \*2 Average capacity (mAh). For reference only.  
 \*3 Rated capacity (mAh).  
 \*4 Need specially designed control system. Please contact Panasonic for details.

TYPICAL CHARGE CHARACTERISTICS

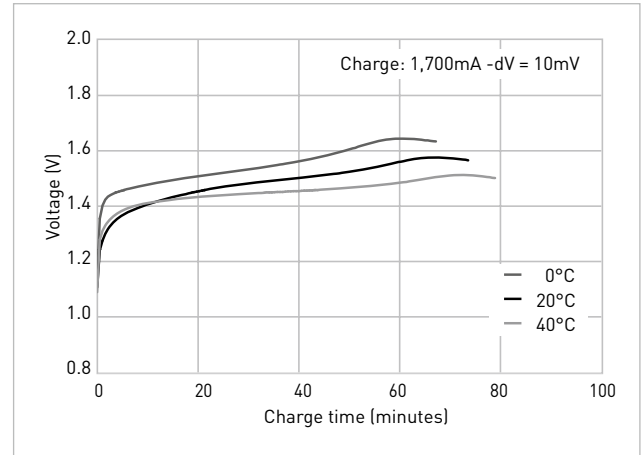

TYPICAL DISCHARGE CHARACTERISTICS

